

Projet: _____ **Type:** _____

Emergency Light running man steel 120-347V 90 mins

Speclite Emergency Light Running Man, made from robust steel, is designed to withstand the most demanding environments. Equipped with a NiCad battery, it provides 90 minutes of autonomy with the spotlights and up to 120 minutes without them. This versatile model includes two sets of wires: one for a 120-347V power supply and another for a low-voltage supply of 6-24V, making it adaptable to various installations. It can be wall or ceiling mounted and comes with multiple pictograms for clear signage.



CARACTERISTICS

- Emergency Lighting: Integrated battery with a runtime of 90 to 120 minutes depending on usage.
- Dual Power Supply: Compatible with voltages of 120-347V and 6-24V for maximum flexibility.
- Multiple Output Indicators: 3 pictograms to represent different directions, meeting all needs.
- Versatile Installation: Wall, ceiling, or side mounting options available. Electrical wires for wall socket connection sold separately.



NOMENCLATURE

| SERIE | LIGHT TYPE | MATERIAL | CASING COLOUR | VOLTAGE | BATTERY RUNTIME | EMERGENCY POWER | BATTERY TYPE | OPTIONS | VER. |
|-----------------|-------------|----------|---------------|----------|-----------------|-----------------|--------------|---------|------|
| EM | RM | S | W | F | 09 | 18 | N | 0 | BY |
| Emergency light | running man | steel | white | 120-347V | 90 mins | 0.2+2x0.8W | NiCad | | BY |

PHOTOMETRIC SPECIFICATIONS

| | |
|-----------------------|---------|
| LUMENS | 100 |
| CCT | 6500K |
| ANGLE | 120° |
| C.R.I. | 70 |
| DIMMABLE | N/A |
| PHOTOCELL | N/A |
| SENSOR | N/A |
| LUMEN MAINTENANCE L70 | N/A |
| LED TYPE | SMD2835 |
| LED QTY | 33 |
| LED VOLTAGE | 3.6V |
| LED MAX CURRENT | 600mA |
| FLICKER | |

MECHANICAL SPECIFICATIONS

| | |
|------------------|---------------|
| HOUSING MATERIAL | Steel |
| HOUSING FINISH | White |
| LENS MATERIAL | Polycarbonate |
| LENS FINISH | Frost |
| WEIGHT | 1.80 KG |
| OPERATING TEMP. | |
| APPLICATION | Indoor |

ELECTRICAL SPECIFICATIONS


| | |
|--------------|----------|
| REAL POWER | 4 W |
| VOLTAGE | 120-347V |
| EFFICIENCY | 25 lm/w |
| POWER FACTOR | 0.5 % |
| T.H.D | |
| FREQUENCY | 50/60Hz |

CERTIFICATIONS

| | |
|------------------------------------|--------------|
| REGULATORY LISTING | cUL |
| EFFICIENCY LISTING | N/A |
| DLC ID | |
| FCC | No |
| BARCODE | 882110007120 |
| ENVIRONMENTAL | IP20 |
| IK PROTECTION | N/A |
| SURGE PROTECTION WITH GROUNDING | |
| SURGE PROTECTION WITHOUT GROUNDING | |

| | |
|---------------------|---------------|
| INSTALLATION | Surface Mount |
| CABLE LENGTH | N/A |

DIMENSIONS

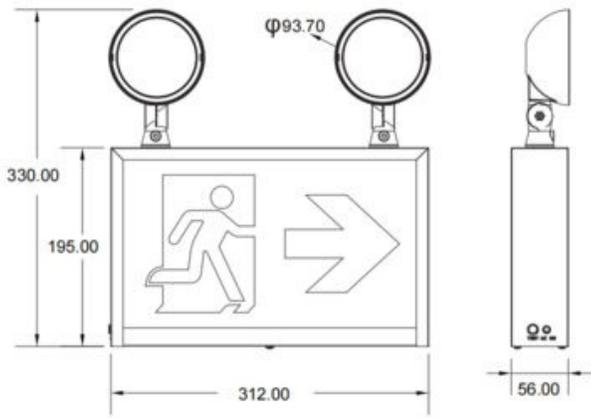

PACKAGING

| DIMENSION INNER CARTON | DIMENSION OUTER CARTON | QUANTITY MASTER | MASTER WEIGHT | PALLET QUANTITY |
|--|--|-----------------|-----------------------|---|
| 34.00 cm X 32.00 cm X 6.00 cm 13 3/8 " X 12 5/8 " X 2 3/8 " | 40.00 cm X 35.00 cm X 33.50 cm 15 3/4 " X 13 3/4 " X 13 1/4 " | 6 | 13.50 kg 29.76 lbs | 108  |

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7