

FL04B Flood / Area Light

150W | 3000K | 120-347V



TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Pre-wired for Optional Motion Sensor
(Sensor & remote sold separately)

Rugged Die Cast Aluminum Housing
(Bronze)

Pressure Relief Respirator
for expansion/contraction

Type III Polycarbonate Optics
Type IV and V available




Quick-Release, Hinged Access Cover
for control compartment

Complete with Trunnion
Interchangeable mounting options sold separately

Removable Access Plate
for easy field installation of twist lock photocell receptacle



Approved by International Dark Sky Association
when used with FL04-FM
(sold separately)

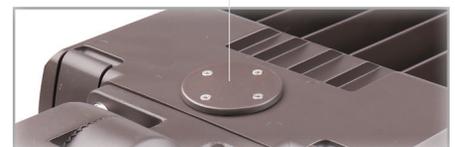

Accessories (Ordered Separately):
Yoke Mount, Slip Fit, Pole Mount, Multi Mount,
Motion Sensor Remote, Motion Sensor, Type IV
and V Optics, Photocell and Receptacle, Shield



FL04-YK-LG



FL-SF01-XL-BZ



FL-PM01-XL-BZ



FL-MM01-XL-BZ



MS04-RC



MS04-MW-TW-DC

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	19,302 lm
Efficacy	131 lm/W
CCT	3000K
CRI	70
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	10-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLZZWDF8MBHK

DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

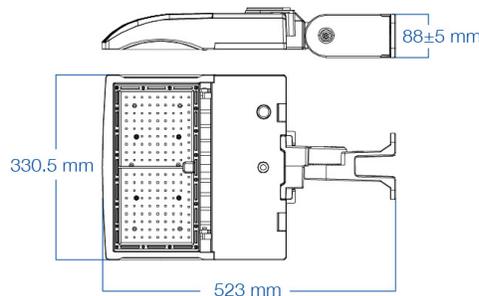

ILLUMINANCE AT A DISTANCE

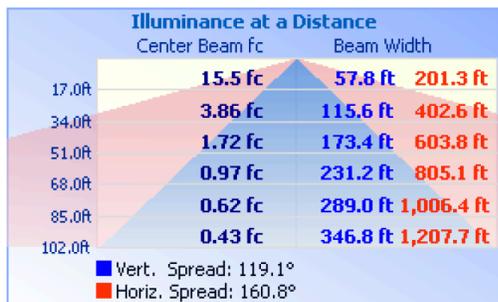

ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 45°C
Operating Temp (with Sensor)	-35 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	1.32 ft²
Net Weight	6.36 kg
Gross Weight	7.11 kg
Carton Qty	1
Carton Dimensions	690 x 380 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL-SF01-XL-BZ
Pole Mount	FL-PM01-XL-BZ
Multi Mount	FL-MM01-XL-BZ
Fixed Mount	FL04-FM
Yoke Mount	FL04-YK-LG
Motion Sensor	MS04-MW-TW-DC
Motion Sensor Remote	MS04-RC
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-SM
Type IV Optics	FL04B-TYPE-IV
Type V Optics	FL04B-TYPE-V