

# FL04B Flood / Area Light

200W | 3000K | 120-347V



**TRUE UNIVERSAL POWER INPUT FROM 120-347V!**

A versatile, clean, and modern appearance that brings a pleasing aesthetic to any project

Pre-wired for Optional Motion Sensor  
(Sensor & remote sold separately)

Rugged Die Cast Aluminum Housing  
(Bronze)

Pressure Relief Respirator  
for expansion/contraction

Type III Polycarbonate Optics  
Type IV and V available



Quick-Release, Hinged Access Cover  
for control compartment

Complete with Trunnion  
Interchangeable mounting options sold separately

Removable Access Plate  
for easy field installation of twist lock photocell receptacle



Approved by International Dark Sky Association  
when used with FL04-FM  
(sold separately)



Accessories (Ordered Separately):  
Yoke Mount, Slip Fit, Pole Mount, Multi Mount,  
Motion Sensor Remote, Motion Sensor, Type IV  
and V Optics, Photocell and Receptacle



FL-SF01-XL-BZ FL-PM01-XL-BZ FL-MM01-XL-BZ MS04-RC MS04-MW-TW-DC

## TECHNICAL DATA




### LIGHT SPECIFICATIONS

|          |            |
|----------|------------|
| Lumens   | 24,215 lm  |
| Efficacy | 123 lm/W   |
| CCT      | 3000K      |
| CRI      | 70         |
| L70 Life | 50,000 hrs |
| Dimmable | 0-10V      |
| Warranty | 10-year    |


### APPROVALS AND LISTINGS

|             |              |
|-------------|--------------|
| cUL         | E482965      |
| DLC Premium | PLPPT600OSLI |

### DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

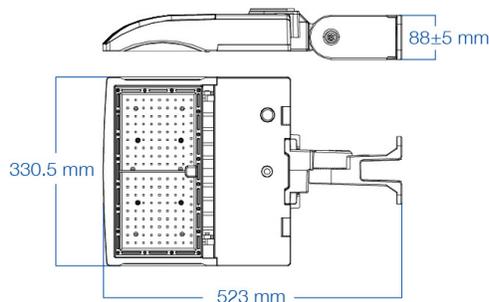

### ILLUMINANCE AT A DISTANCE

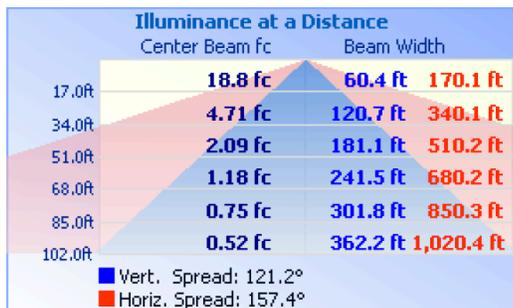

### ELECTRICAL

|                              |             |
|------------------------------|-------------|
| Wattage                      | 200W        |
| Voltage                      | 120-347V    |
| Power Factor                 | 0.9         |
| THD                          | 15%         |
| Operating Temp               | -40 to 45°C |
| Operating Temp (with Sensor) | -35 to 45°C |

### CONSTRUCTION

|                   |                    |
|-------------------|--------------------|
| Housing           | Die-Cast Aluminum  |
| Cover             | Polycarbonate      |
| Finish            | Bronze             |
| IP Rating         | IP65               |
| EPA               | 1.32 ft²           |
| Net Weight        | 5.97 kg            |
| Gross Weight      | 6.72 kg            |
| Carton Qty        | 1                  |
| Carton Dimensions | 690 x 380 x 155 mm |

### ACCESSORIES (SOLD SEPARATELY)

|  |                     |
|--|---------------------|
| Slip Fit                                       | FL-SF01-XL-BZ       |
| Pole Mount                                     | FL-PM01-XL-BZ       |
| Multi Mount                                    | FL-MM01-XL-BZ       |
| Fixed Mount                                    | FL04-FM             |
| Yoke Mount                                     | FL04-YK-LG          |
| Motion Sensor                                  | MS04-MW-TW-DC       |
| Motion Sensor Remote                           | MS04-RC             |
| Photocell and Receptacle<br>for 120-277V sites | JL-200 and JL-205LV |
| Photocell and Receptacle<br>for 277-480V sites | JL-200 and JL-207E  |
| Shield   | FL04B-SHIELD-SM     |
| Type IV Optics                                 | FL04B-TYPE-IV       |
| Type V Optics                                  | FL04B-TYPE-V        |

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | [orders@csc-led.com](mailto:orders@csc-led.com) | (519) 880 - 9833