

## FLUSH MOUNTS

FM1-5-5CCT-010V | FM1-7-5CCT-010V | FM1-9-5CCT-010V | FM1-12-5CCT-010V



### FOR 0-10V DIMMING

BRAND	SERIES	MODEL	VOLTAGE RANGE
LUTRON	DIVA	DVSTV	120-277V 50/60Hz
LEVITON	DECORA	DS710	120-277V 50/60Hz

We strongly recommend using one of the above 0-10v dimmers to ensure peak performance of the LED fixture.

### FOR TRIAC DIMMING

BRAND	SERIES	MODEL	VOLTAGE RANGE
LEVITON	SURESLIDE	6681	120V 60Hz
LUTRON	CASETA	PD-6WCL	120V 60Hz
LUTRON	DIVA	DVCL-153P	120V 60Hz
LUTRON	SKYLARK CONTOUR	CTCL-153P	120V 60Hz
LEVITON	SURESLIDE	6672	120V 60Hz
LUTRON	MAESTRO	MACL-153M	120V 60Hz
LUTRON	TOGGLER	TGCL-153P	120V 60Hz

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.




## FLUSH MOUNTS FM1-5-5CCT-010V


### INSTALLATION GUIDE

#### OPTION 1: FLUSH MOUNT


##### STEP 3

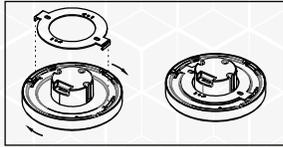

3. Snap and fix the clip in the bracket.  
(See Step 3)




##### STEP 4

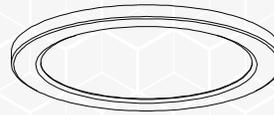


4. Turn on the power and Light up the lamp.

#### OPTION 2: RETROFIT A RECESSED CAN


##### STEP 1



1. Choose a 5 or 6 inch housing and secure it with screws at the corresponding holes on the bracket.




##### STEP 2

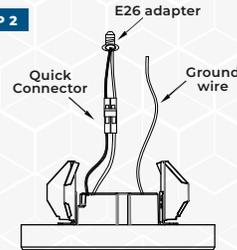

2. Insert wires into Quick connector. Black to black and white to white. Attach ground Wire to ground screw in recessed can. Adjust 5CCT switch.

##### STEP 3




3. Turn E26 adapter into socket base. Connect Quick Connectors. Tuck all wires into recessed can. Squeeze springs and push up into recessed can.

##### STEP 4



4. Turn on the power and Light up the lamp.

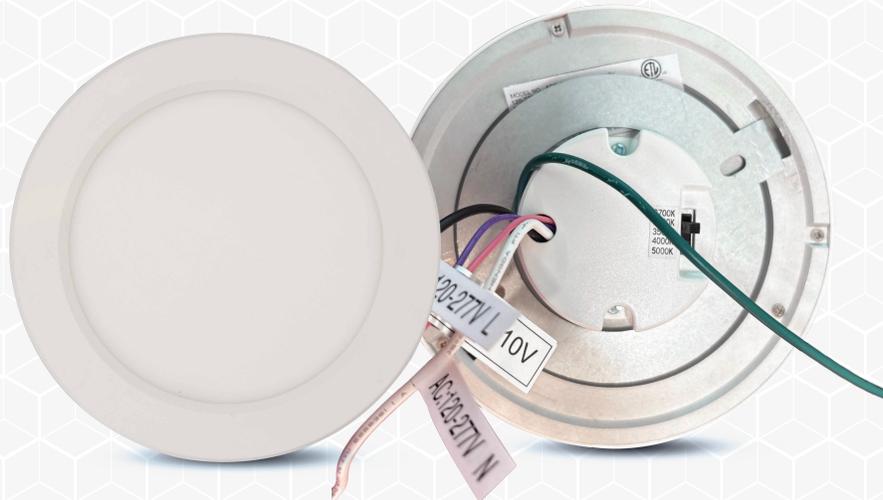

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

