

Projet: _____ Type: _____ Qté: _____

Highbay UFO 200W 100-277V 5000K

CARACTERISTICS

- -
- -
- -
- -



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
HU	00	C	B	D	5	200	0	D	CG
UFO highbay	120°	clear	black	100-277V	5000K	200W	N/A	dim 0-10V	CG

PHOTOMETRIC SPECIFICATIONS

LUMENS	29,528
CCT	5000K
ANGLE	120°
C.R.I.	86
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	100,000 hrs
LED TYPE	Phillips SMD3030
LED QTY	320
LED VOLTAGE	DC120V
LED MAX CURRENT	1530mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	3.80 KG
OPERATING TEMP.	-40°C ~ 50°C
APPLICATION	Indoor / Outdoor
INSTALLATION	Suspended


ELECTRICAL SPECIFICATIONS

REAL POWER	197.4 W
VOLTAGE	100-277V
EFFICIENCY	149.89 lm/w
POWER FACTOR	90.1 %
T.H.D	15.3 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	DLC Premium
DLC ID	P8P4AZ8P
FCC	
BARCODE	882110005089
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	4KV
SURGE PROTECTION WITHOUT GROUNDING	2.4KV


DIMENSIONS

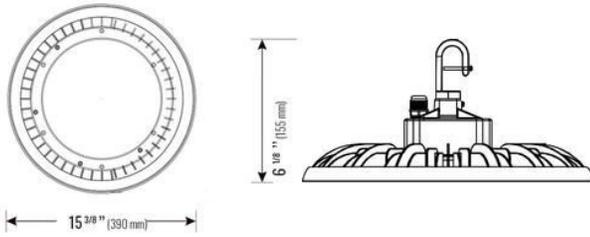

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
45.00 cm X 43.00 cm X 14.00 cm	N/A	N/A	4.00 kg	44 
17 3/4 " X 16 7/8 " X 5 1/2 "			8.82 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7