

Projet:	Type:	Qté:
---------	-------	------

Linear Architectural 50-40-35-30-25W 120-347V 2700-3500-4000-5000-5000-5700K

Specilite’s linear architectural luminaire transforms ceilings into a clean, continuous design statement while delivering beautifully balanced illumination. The configurable up/down light lets you highlight the architecture, reduce harsh contrasts, and create a premium look in offices, corridors, retail, and common areas. With on-site 5CCT and 3 power selection, you get the exact ambiance and performance you want—without delays or re-ordering.



CHARACTERISTICS

- adjust the uplight/downlight ratio (30% / 10% / OFF) to enhance visual comfort and elevate the space.
- 5CCT selectable 2700-3000-3500K-4000-5000K: match any design intent, from warm welcoming tones to crisp modern whites.
- 3 power selectable: dial in the right lumen output to hit target levels and optimize efficiency.
- Full layout flexibility: 7 joint options (“L”, “T”, “X”, “Y”, “V” 60°, “V” 120°, “-”) plus black or white finish for seamless architectural integration.

NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
LA	04	F	W	F	C	050	D	M	SS
Arch Linear	4ft	frost	white	120-347V	2700-3500-4000-5000-5000-5700K	50-40-35-30-25W	dim 0-10V	motion ready 12VDC	SS

PHOTOMETRIC SPECIFICATIONS

LUMENS	7,000
CCT	27-35-40-50-50-57K
ANGLE	120°
C.R.I.	80
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	Motion Sensor Receptacle
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	390
LED VOLTAGE	DC100-138V
LED MAX CURRENT	360mA
FLICKER	Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	50 W
VOLTAGE	120-347V
EFFICIENCY	140 lm/w
POWER FACTOR	90 %
T.H.D	20 %
FREQUENCY	50/60Hz

MECHANICAL SPECIFICATIONS


HOUSING MATERIAL	Aluminium, Powder Coated
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	1.40 KG
OPERATING TEMP.	-40°C ~ 45°C
APPLICATION	Indoor

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	
FCC	No
BARCODE	0
ENVIRONMENTAL	IP20
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	2KV
SURGE PROTECTION WITHOUT GROUNDING	1KV

INSTALLATION	Surface Mount, Suspended
CABLE LENGTH	6'

DIMENSIONS

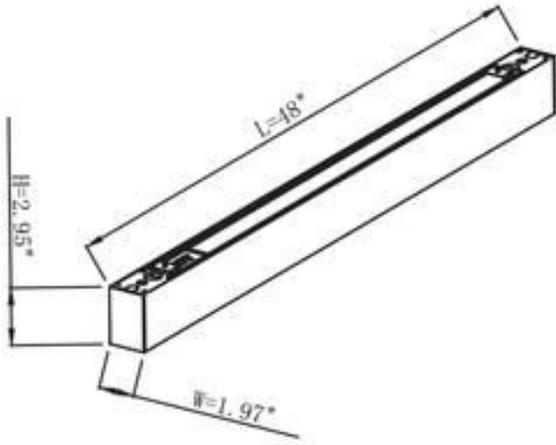

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
125.00 cm X 5.40 cm X 9.30 cm	129.00 cm X 26.80 cm X 32.00 cm	12	21.00 kg	216
49 1/4 " X 2 1/8 " X 3 5/8 "	50 3/4 " X 10 1/2 " X 12 5/8 "		46.30 lbs	

PRODUCTS IMAGES

No Product images

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7