



ANGLED LED PANELS HELP DIRECT LIGHT EXACTLY WHERE IT IS NEEDED.
 Low bay retrofits are ideal for ceiling fixtures that require light to be pushed down & out.

- Available in 60W models replacing up to 175W HID
- Pretested & potted drivers are protected against vibration & moisture
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects and dust
- USA designed & specified LED driver
- "D" models are continuously dimmable down to 20% using a wired 0-10V dimming circuit. Lamps also include 12V auxiliary power for sensors



8056M



8035E




•----- INCLUDES UPLIGHT



PART #	VOLTAGE*	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-8056E40D-A	120-277V	175W	45W	5334	4000K	E26	N/A
LED-8056E50D-A				5560	5000K		
LED-8056M40D-A				5334	4000K	EX39	S-UOXM21
LED-8056M50D-A				5560	5000K		S-ZHYQBG
LED-8035E40-A			60W	6684	4000K	E26	N/A
LED-8035E57-A				7062	5700K		

* 347 VOLT OPTIONS FOR CANADA SHOWN ON PG. 2



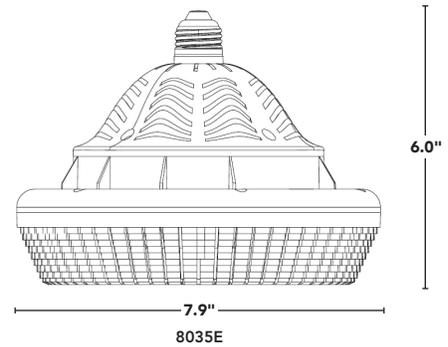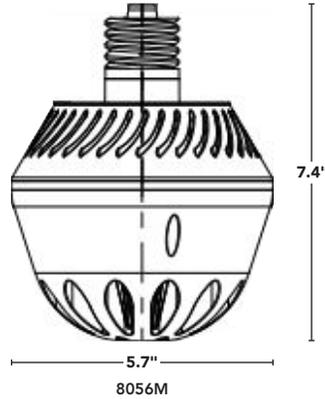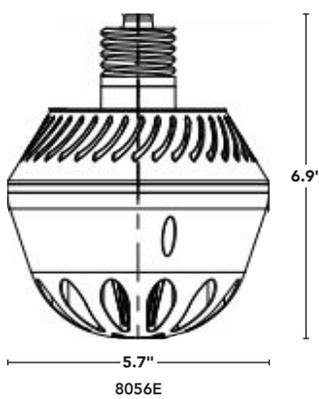

🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-8056E40CD-A	220-347V	175W	45W	5334	4000K	E26	N/A
LED-8056E50CD-A				5560	5000K		
LED-8056M40CD-A				5334	4000K	EX39	S-6D0UHW
LED-8056M50CD-A				5560	5000K		S-H025ZA
LED-8035E40C-A			60W	6684	4000K	E26	N/A
LED-8035E57C-A				7052	5700K		