



ULTRA-BRIGHT LED RETROFITS FOR HIGH CEILING ENVIRONMENTS.

Models w/o active cooling are designed for open fixtures and offer silent operation w/ a fanless design.

..... **POWERFUL PERFORMANCE**

- Available in 90W, 150W and 270W models replacing up to 1000W HID
- Dynamic temp control supports a longer, brighter life
- Pretested & potted drivers are burned-in 3X prior to shipping and protected against vibration & moisture
- Expertly engineered to work efficiently in open fixtures & damp environments, while also protected against insects and dust
- Dual stage MOV protection w/ integrated 6kA surge
- USA designed & specified LED driver
- "D" models are continuously dimmable down to 20% using a wired 0-10V dimming circuit. Lamps also include 12V auxiliary power for sensors


8242M



PART #	VOLTAGE*	REPLACES	WATTAGE	LUMENS	CCT**	BASE
LED-8136M50D	120-277V	250W	90W	12900	5000K	EX39
LED-8130M50D		400W	150W	21200		
LED-8242M50D		1000W	270W	38700		
LED-8242M50D-HV	277-480V					

* 347 VOLT OPTIONS FOR CANADA SHOWN ON PG. 2 ** ADDITIONAL CCT OPTIONS SHOWN ON PG. 2



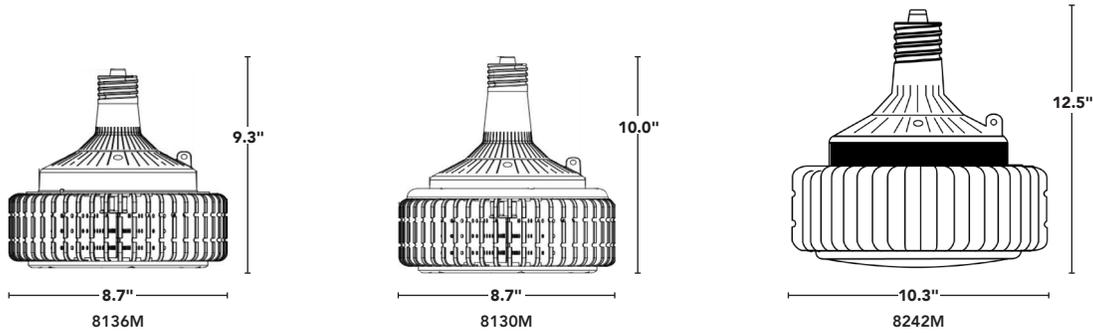

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	FEATURES	BASE	DLC CODE	
LED-8136M30D	120-277V	250W	90W	12200	3000K	N/A	EX39	S-X2RLH9	
LED-8136M40D				12400	4000K			S-4IR916	
LED-8136M50D				12900	5000K			S-JQICG6	
LED-8130M30D		400W		150W	20600	3000K			S-MPR2O7
LED-8130M40D					20900	4000K			S-SXPLDF
LED-8130M50D					21200	5000K			S-TJLD97
LED-8242M30D	277-480V	1000W	270W		32690	3000K			S-NSCR4B
LED-8242M40D					38400	4000K			S-WH7C9B
LED-8242M50D					38700	5000K			S-8OQFTV
LED-8242M30D-HV				32690	3000K	S-NTGWYE			
LED-8242M40D-HV				38400	4000K	S-3SDUK8			
LED-8242M50D-HV				38700	5000K	S-7J60W5			

 347 VOLT OPTIONS FOR CANADA 

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	FEATURES	BASE	DLC CODE		
LED-8136M40CD	220-347V	250W	90W	12400	4000K	N/A	EX39	S-0XRJQ5		
LED-8136M50CD				12900	5000K			S-MOTNJ7		
LED-8130M40CD		400W		150W	20900	4000K			S-VBA2M7	
LED-8130M50CD					21200	5000K			S-RKXBUY	
LED-8242M30C		1000W			270W	32690		3000K		N/A
LED-8242M40C						38400		4000K		
LED-8242M50C	38700		5000K							

 INCLUDES UPLIGHT  ACTIVE COOLING