




ULTRA-BRIGHT LED RETROFITS FOR HIGH CEILING ENVIRONMENTS. Models w/ active cooling are safe for use in enclosed fixtures. Designed w/ FLEXCOLOR, allowing for reduced inventory and in-field adjustability.

- Available in 95W and 140W models replacing up to 400W HID
- Easily adjust the color temperature via a switch on the unit
- Pretested & potted drivers are burned-in 3X prior to shipping and protected against vibration & moisture
- Dual stage MOV protection w/ integrated 6kA surge
- USA designed & specified LED driver
- Continuously dimmable down to 20% using a wired 0-10V dimming circuit. Lamps also include 12V auxiliary power for sensors

FLEXCOLOR
SWITCH BETWEEN 3 CCTs

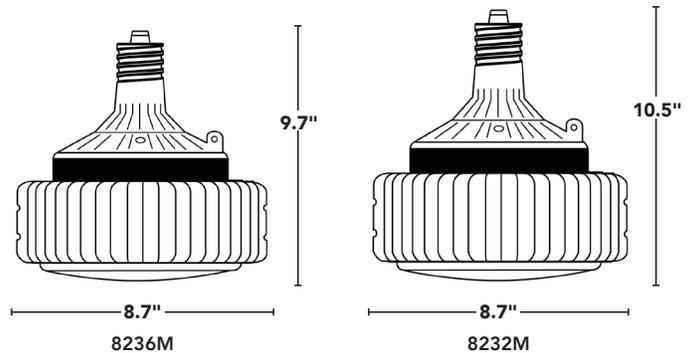

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-8236M345D	120-277V	250W	95W	13700/14400/14600	FLEXCOLOR 3000K/4000K/5000K	EX39	S-X42DN1
LED-8236M345CD	220-347V						S-DPWN54
LED-8232M345D	120-277V	400W	140W	19900/20900/21100			S-V65KRY
LED-8232M345D-HV	277-480V						S-ETHKAF

