





CONTOUR LIGHTING AT ITS BEST!

The ultimate in profiles that disappear completely into the wall surface, the 315 is designed to provide downward 90° angle lighting. With a longer inner section than the 310, this profile provides a greater surface area for light reflection, which optimizes safety applications in areas with poor or deficient lighting. Choice of two high-end lenses to ensure optimal light diffusion. It can be used with all type A joiners to build a solid structure. This profile fits ½" and 5/8" gypsum panels for a seamless finish. Ideal for residential or commercial applications.

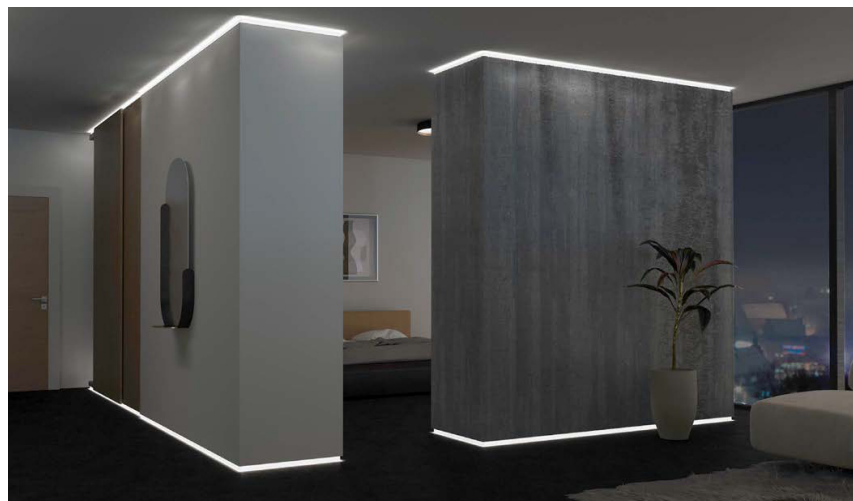

TECHNICAL DRAWING

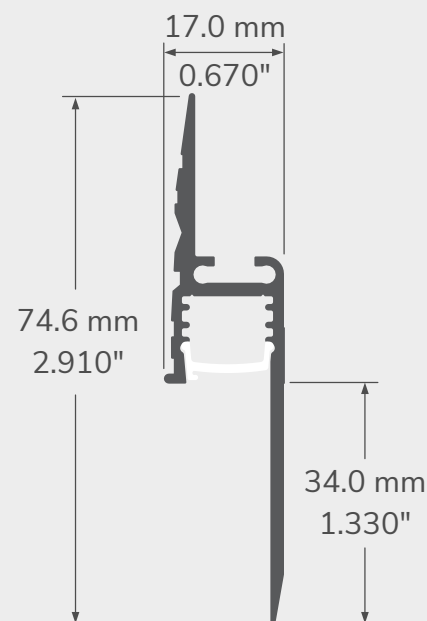

FEATURES

- Available in 96 in (2.43 m) lengths for easy and accurate on-site installation
- Direct fit with standard ½" and 5/8" gypsum panels
- 60% longer reveal than the 310 profile
- Impeccable finish thanks to the grooves that allow the profile to be levelled with joint compound
- Choice of high-end optics: PRIMElens or SiLens, made of flexible silicone, which can be installed with the touch of a finger
- LED light sources in 8 mm (1.5 W/ft, 2.93 W/ft, and 4.5 W/ft) with 7 colour temperatures (2400 K to 6200 K) and in 10 mm (4.4 W/ft & 5.9 W/ft RGB and 7.0 W/ft HOS)
- Application guide for light sources 10 mm (0.394") or less in IP22
- Indoor use

PROFILE	LENSES	ENDCAPS	JOINERS	ACCESSORIES	LENGTH
 315 - Profile	 PR- Prime lens	 3150 left endcap	 Type A straight joiner	 Drywall small headscrew (x100)	Available in straight section of 8 feet (96 inches/2.4 m). *Cut on site
	 SIL - SiLens	 3150 right endcap	 Type A horz. 45°/135° joiner		
			 Type A horz. 90° joiner		

