

Projet: \_\_\_\_\_ Type: \_\_\_\_\_

**Linear Fixture 50-40-30W 120-347V 3500-4000-5000K**

**CARACTERISTICS**

- -
- -
- -
- -



**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
LF	04	F	W	F	C	050	0	D	SS
Linear fixture	4ft	frost	white	120-347V	3500-4000-5000K	50-40-30W	N/A	dim 0-10V	SS

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	7,576
CCT	3500/4000/5000K
ANGLE	120°
C.R.I.	83
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	100,000 hrs
LED TYPE	SMD 2835
LED QTY	480
LED VOLTAGE	120V
LED MAX CURRENT	0.46
FLICKER	Not Flicker-Free

**ELECTRICAL SPECIFICATIONS**

REAL POWER	49.9 W
VOLTAGE	120-347V
EFFICIENCY	154.61 lm/w
POWER FACTOR	94 %
T.H.D	14.4 %
FREQUENCY	50/60Hz


**CERTIFICATIONS**

REGULATORY LISTING	cETL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-13TC04
FCC	No
BARCODE	0
ENVIRONMENTAL	IP20
IK PROTECTION	IK06
SURGE PROTECTION WITH GROUNDING	2KV
SURGE PROTECTION WITHOUT GROUNDING	2KV

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Steel
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	1.70 KG
OPERATING TEMP.	-25°C ~ 40°C
APPLICATION	Indoor
INSTALLATION	Surface Mount
CABLE LENGTH	N/A

## DIMENSIONS

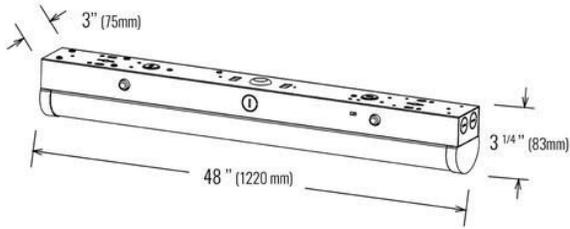

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
122.00 cm X 11.00 cm X 10.00 cm	122.60 cm X 22.90 cm X 45.70 cm	6	16.00 kg	72 
48" X 4 3/8" X 3 7/8"	48 1/4" X 9" X 18"		35.27 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTREAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7