

SPECIFICATION

NEXLEDS[®]

NEXLEDS LTD



5 CCT
Changeable

VIDEO



	2700K	3000K	3500K	4000K	5000K
2"	(585 LM)	(608 LM)	(620 LM)	(630 LM)	(622 LM)
3"	(752 LM)	(790 LM)	(813 LM)	(860 LM)	(850 LM)
4"	(1210LM)	(1258 LM)	(1300 LM)	(1350 LM)	(1343 LM)

Architectural Gimbal Downlight

NX2AGDL-9W
NX3AGDL-12W
NX4AGDL-18W

Specification

PRODUCT NAME :	Architectural Gimbal Downlight
MODEL NO. :	NX2AGDL-9W / NX3AGDL-12W / NX4AGDL-18W
SPECIFICATION :	TYPE IC;AC120V; 50/60Hz; 9W / 12W / 18W
WORKING TEMP :	-4(°F)~+122(°F)
POWER FACTOR :	>0.90; Flicker free
CRI(RA) :	>90
COLOR :	White Color
LIGHT SOURCE :	COB Chip
LUMEN :	630 LM / 860 LM / 1350 LM
CABLE TYPE	Fire rated 20 Mins FT4 cable
LIFE TIME :	50000 hrs
BEAM ANGLE :	38°
PRODUCT SIZE :	D3.03*H3.43 inch / D3.82*H3.44 inch / D4.61*H4.25 inch
CUT OUT :	2.17 inch / 3.07 inch / 3.73 inch
IP :	Suitable for wet location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K Changeable


SPECIFICATION

NEXLEDS®

NEXLEDS LTD

Feature:

- Professional optical lens, uniform light
- Powder coated surface treatment is durable and not easy to fall off
- Excellent aluminum reflector offers even and better light color, bringing visual comfort
- Tilting gimbal light source for directional lighting

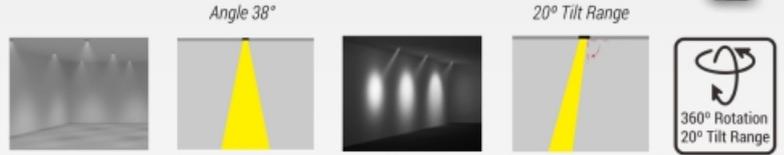

360° Rotation

20° Tilt Range

Narrow light angle 38°



Finishing section trims are durable die cast aluminum with precision painted finish.

Die cast heat sinks provide optimized passive thermal management to maximize LED lumen maintenance.



Reflector

Rotating bracket

Rotating face ring

COB (chip on board) provides long useful life with precise color control over time.

It is suitable for small narrow light, narrow light, large narrow light.

The precise rotating bracket is placed on the rotating surface ring, allowing the lamp body to rotate 360 degrees and tilt at an angle

Dimension:

Size	Dimension		Power	Hole Cutout
2inch			9W	
3inch			12W	
4inch			18W	