


# SPECIFICATION

**NEXLEDS**<sup>®</sup>  
NEXLEDS LTD



**5 CCT**  
Changeable

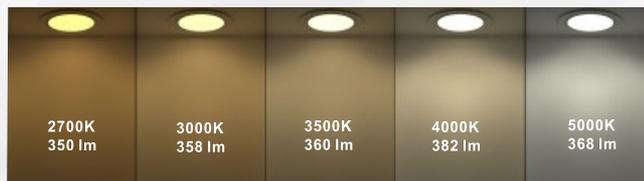

**3" Slim Panel Downlight**

**NX-3ES03-5CCT**

**6W**


## Specification

PRODUCT NAME :	3" Slim Panel Downlight
MODEL NO. :	NX-3ES03-5CCT
SPECIFICATION :	AC120V; 50/60Hz; 6W
WORKING TEMP :	-4 (°F) ~ +122(°F)
POWER FACTOR :	>0.90
CRI(RA) :	>90
COLOR :	White Color
LIGHT SOURCE :	SMD2835 Chip
LUMEN :	380 LM
LIFE TIME :	50000 hrs
BEAM ANGLE :	120°
PRODUCT SIZE :	D (3.35 inch)* H (0.79 inch)
CUT OUT :	3.07 inch
IP :	Suitable for wet location
APPLICATION :	Home, Shop, Hotel
WARRANTY :	5 years
STANDARD :	ETL
DIMMABLE :	Triac Dimming
COLOR TEMP :	2700K-3000K-3500K-4000K-5000K (5 CCT Changeable)

**Feature:**

- Replaces legacy CFL, HID or incandescent downlights
- Provides comfortable diffused light with no dark spots
- Dimmable to 10% with a wide array of dimmers
- Pre-wired with poke-in connectors for easy installation
- Clips for secure installation onto existing cillings


**Dimension:**

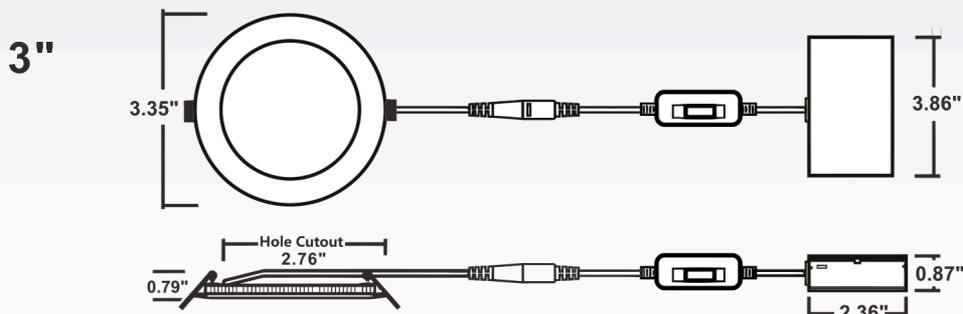


**Applications:**

- Residential
- Property management
- Office
- Multi-family
- Healthcare
- Retail
- Hospitality


**Installation:**




**STEP1:**  
Turn off the power before installation. Remove the existing bulb and if necessary remove the existing trim. Open the hole on the mounting surface according to the size of fixture.




**STEP2:**  
Push the switch on the cable to select the correct color temperature, as shown in Fig 2.



**STEP3:**  
Open the junction box, connected L/G/N wires with quick connectors respectively. Conned the fixture power cable to the junction box. See Fig3.



**STEP4:**  
Install the fixture to ceiling surface, as shown in Fig4.



**STEP5:**  
Turn on the power after installation, check the fixture can work well, as shown in Fig5.