

LED Exit Signs

MODEL OE-316




HIGHLIGHTS

- LED Running Man Combo Exit Sign made of UV stabilized plastic with 120 minutes backup time and adjustable heads
- LED Exit Signs with innovative, snap-together design, which allow for fast and easy installation
- Injection-molded thermoplastic ABS housing with Universal mounting (wall, side and ceiling)
- Has UL-94V-0 flame rating and is fire-retardant
- Includes Test button and charge indicator light
- Provides Overcharge & over-discharge protection
- As per CSA recommendations, batteries should be replaced every 4 years
- Case Quantities: 6

SPECIFICATIONS

Model	OE-316
Total Fixture Wattage	4.5W
Voltage	120V AC or 347V AC /60Hz
Lamp Head Lumens & Wattage (per head)	AC: 1w/head, 90 lumens (total) DC: 170 lumens (total)
Wattage and lumens of the pictogram part	AC: 4.5w and 23 lumens DC: 130 lumens
Remote head CCT	AC: 6100K DC: 6300K
Pictogram CCT	AC: 7000K DC: 6500K
Material	Injection molded thermoplastic ABS housing
Battery	3.6V 1800mAh
Emergency Duration Time	≥ 120 min
Conversion Time	< 0.2 seconds
Insulation	II, Range: 80m ²
Operating Temperature	0°C ~ +40°C
Warranty	5 Years
Case Quantities	6

DIMENSIONS

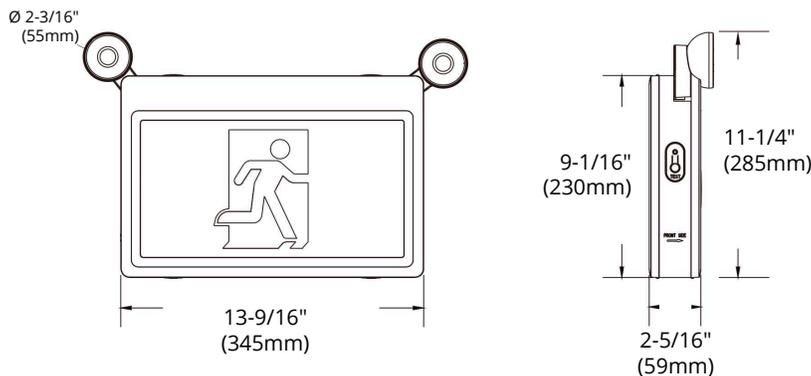

* Included in packaging



* Optional Accessory:
OE-UPDOWN-316+126 and OE-L+R-316+126

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: