

Projet:	Type:	Qté:
----------------	--------------	-------------

Post-Top 75/60/40W 120-347V 3000-4000-5000K

The Speclite Post-top luminaire enhances any street or pathway setting with the heritage charm of traditional lantern style post top lighting. It tastefully complements the architectural and environmental design needs of parks, campuses and residential streets.

CARACTERISTICS

- Compatible with diameters up to 2-3/8" for barrel-head mounting.
- A variety of photometric distributions for different applications: Type II-S, Type II-M, Type III-M, Type IV and Type V-S
- Complies with ANSI/IEEE C136.31 for 3G vibration resistance.
- Easy access to component housing including LED PCB, LED driver, etc. for easy, hassle-free maintenance.



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
PT	90	C	R	F	C	075	D	P	SN
Pole top light	90°	clear	bronze	120-347V	3000-4000-5000K	75/60/40W	dim 0-10V	Photocell base	SN

PHOTOMETRIC SPECIFICATIONS

LUMENS	9,218
CCT	3CCT (3000-4000-5000K)
ANGLE	90°
C.R.I.	83
DIMMABLE	0-10V DC
PHOTOCELL	Twist Lock Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	420
LED VOLTAGE	27-54V
LED MAX CURRENT	1000-2000mA
FLICKER	Flicker-Free

ELECTRICAL SPECIFICATIONS

REAL POWER	76.6 W
VOLTAGE	120-347V
EFFICIENCY	120.34 lm/w
POWER FACTOR	90 %
T.H.D	15 %
FREQUENCY	50/60Hz

CERTIFICATIONS


REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-7JRXBA
FCC	No
BARCODE	882110008653
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	10KV
SURGE PROTECTION WITHOUT GROUNDING	10KV

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium
HOUSING FINISH	Bronze

LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	5.50 KG
OPERATING TEMP.	-40°C ~ 45°C
APPLICATION	Outdoor
INSTALLATION	Wall & Poll Mount
CABLE LENGTH	N/A

DIMENSIONS

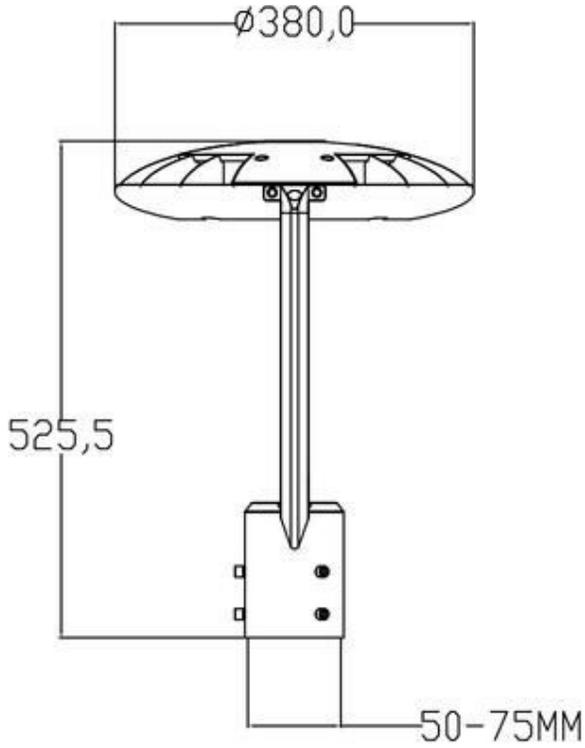

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
73.00 cm X 51.50 cm X 18.00 cm 28 3/4 " X 20 1/4 " X 7 1/8 "	N/A	N/A	5.90 kg 13.01 lbs	12 

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7