

# LED FIXTURE

## RIGID Series



### LED 4" Gimbal RGD-CHY2

4" LED gimbal light, 5 CCT switchable



5-year limited warranty


Operating temperature range -20 °C ~ +40 °C



#### Features & Benefits

- 5 CCT color temperature switchable
- Available in brushed nickel, black, gold and white
- 120V input, PF>0.94, beam angle 40°
- Adjustable with 360° rotation
- TRIAC dimmable, high CRI 80+
- Type IC rated, FT6 cable
- Default with 4" trim, 3" trim sold separately
- Damp location approved

#### Dimensional Drawing

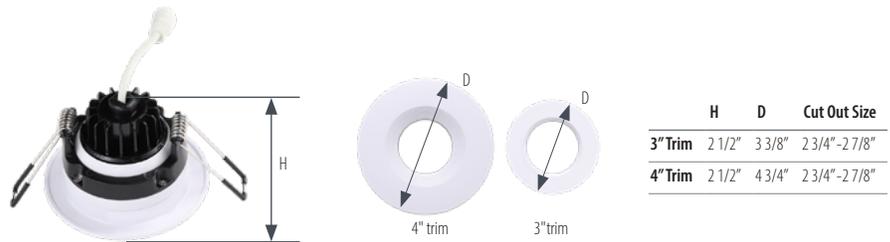

#### Ordering Information Example: RGD-CHY2/4/8W/5CCT/WH/D

Family Name	Fixture Type	Trim Size	Wattage	CCT (Kelvin)	Trim Finish Color	Dimmable
RGD (Rigid)	CHY2 (Module & driver, gimbal light, 5 CCT switchable)	4 (4")	8W	5CCT (27/30/35/40/50K)	WH (White) BN (Brush nickel) BLK (Black) GD (Gold)	D (TRIAC Dimmable)

#### Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Damp Location	Case Qty.
3682102	RGD-CHY2/4/8W/5CCT/WH/D	RIGID 4" Dia. white, gimbal module & trim, selectable 5CCT, triac dimmable, 120V, 40 Deg. FT4 cable	8	120	39,000	700	27/30/35/40/50	≥80	Yes	40
3682101	RGD-CHY2/4/8W/5CCT/BN/D	RIGID 4" Dia. brushed nickel, gimbal module & trim, selectable 5CCT, triac dimmable, 120V, 40 Deg. FT4 cable	8	120	39,000	700	27/30/35/40/50	≥80	Yes	40
3682100	RGD-CHY2/4/8W/5CCT/BLK/D	RIGID 4" Dia. black, gimbal module & trim, selectable 5CCT, triac dimmable, 120V, 40 Deg. FT4 cable	8	120	39,000	700	27/30/35/40/50	≥80	Yes	40
3662179	RGD-CHY2/4/8W/5CCT/GD/D	RIGID 4" Dia. gold, gimbal module & trim, selectable 5CCT, triac dimmable, 120V, 40 Deg. FT4 cable	8	120	39,000	700	27/30/35/40/50	≥80	Yes	40
3660124	RGD-CHY/3/TRIM/WH	RIGID 3" Dia. white trim								
3660125	RGD-CHY/3/TRIM/BN	RIGID 3" Dia. brushed nickel trim								
3660126	RGD-CHY/3/TRIM/BLK	RIGID 3" Dia. black trim								
3660314	RGD-CHY/3/TRIM/GD	RIGID 3" Dia. gold trim								