



- Choose from 2 fixture styles with multiple diameters
- Powered by the Base LEDCR G2 light engine — easily replaceable & upgradeable
- Suitable for dry and damp locations



DESIGNER


POWERED BY  
THE BASE LEDCR

SCAN FOR THE BASE  
LEDCR SPEC SHEET



UTILITY

**SUPERFLEX**  
SWITCH BETWEEN  
3 WATTAGES & 3 CCTS

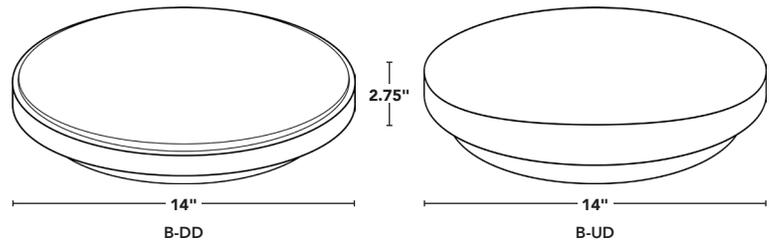

DIMMING



SURGE PROTECTION



BEAM ANGLE



CRI



-4°F TO 122°F

OPERATING TEMP



50,000hrs RATED LIFE

PART #	UPC	WATTAGE	LUMENS	CCT
RP-B-DD-14N-10L-40K-WC	844006059804	FLEXWATT 6W/ <b>10W</b> /15W	700-1500	FLEXCOLOR 3000K/3500K/ <b>4000K</b>
RP-B-UD-14N-10L-40K-WC	844006060909			

REMPHOS BASE PRODUCT

DEFAULT WATTAGE AND CCT ARE SHOWN IN BOLD.

