




**ALL-IN-ONE DESIGN WITH SOLAR PANEL, LIGHT ENGINE, AND BATTERY BUILT INTO THE FIXTURE.** No need for a power source, which eliminates the need for trenching and wiring. Easy to install on a standard 3-inch pole w/ supplied screws.

- Perfect for parks, city streets, school campuses and any pedestrian walkway
- Comparable to 150W HID
- Automatically turns on at night and can be set to different operating modes including constant output and bi-level dimming with motion sensing
- Constructed of strong & lightweight aluminum alloy
- 3.2V/50AH LiFePO4 battery
- 165 lumens per watt



↑ ALL-IN-ONE DESIGN



BATTERY CHARGE TIME



BATTERY LIFE



BATTERY CHARGING TEMP



OPERATING TEMP



REPLACEABLE BATTERY



BEAM ANGLE



50,000hrs RATED LIFE

| PART #               | UPC                 | COMPARES TO  | LUMENS          | CCT   | DIMENSIONS    | EPA    | LISTINGS |
|----------------------|---------------------|--|-----------------|-------|---------------|--------|----------|
| SL-CPT-25L-30K-BK-G1 | 844006088385        | 150W   | 2500            | 3000K | 21.3" x 13.4" | 1.0 SF | CE FC    |
| SL-CPT-25L-40K-BK-G1 | 844006088392        |  |                 | 4000K |               |        |          |
| ACCESSORIES          |                     |  | OPERATING MODES |       |               |        |          |
| SL-CPT-BATTERY       | REPLACEMENT BATTERY |  CONSTANT BRIGHTNESS    TIMER    MOTION SENSING |                 |       |               |        |          |

## Light Efficient Design


847.380.3540 • led-llc.com • sales@led-llc.com

PART NUMBER BUILDER

| MFR      | PRODUCT             | LUMENS        | CCT                        | FIXTURE COLOR | GENERATION     |
|----------|---------------------|---------------|----------------------------|---------------|----------------|
| SL       | CPT                 | 25L           |                            | BK            | G1             |
| (SOLERA) | (CIRCULAR POST TOP) | (2500 LUMENS) | 30K (3000K)<br>40K (4000K) | (BLACK)       | (GENERATION 1) |

EXAMPLE PART NUMBER SL-CPT-25L-30K-BK-G1

DIMENSIONS

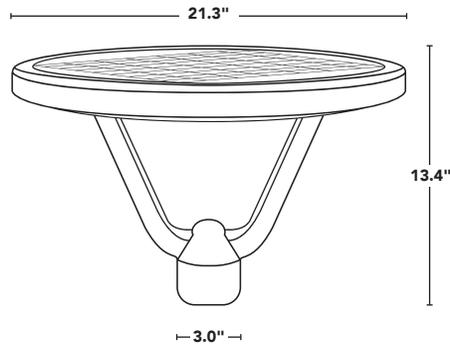

Light Efficient Design



847.380.3540 • led-llc.com • sales@led-llc.com

PHOTOMETRICS


| FOOT CANDLES | ISO-LINE COLOR   |
|--------------|--|
| 1 FC         | BLACK    |
| 0.5 FC       | MAGENTA  |
| 0.1 FC       | BLUE     |

MOUNTING HEIGHT: 8FT


ILLUMINANCE (FC)

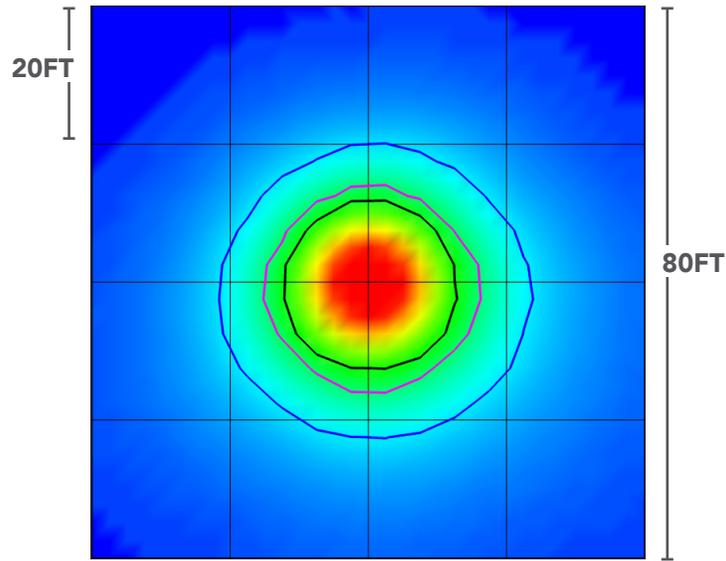

MOUNTING HEIGHT: 12FT

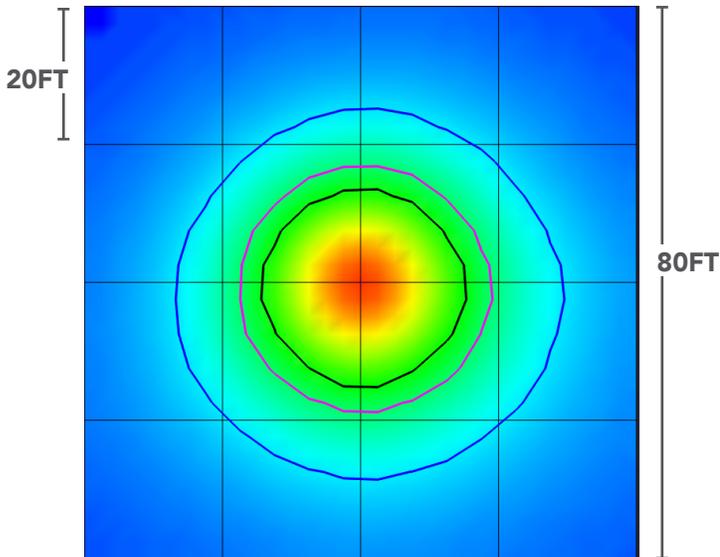

MOUNTING HEIGHT: 15FT

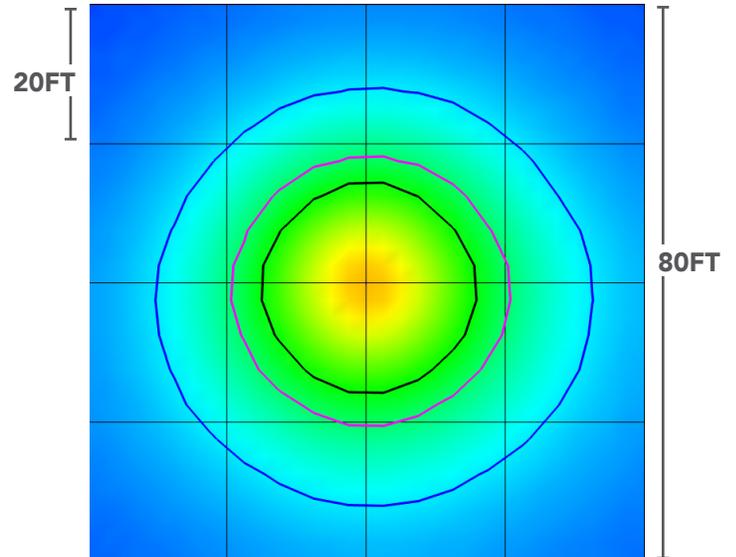

Light Efficient Design

847.380.3540 • led-llc.com • sales@led-llc.com