

3" SLIM LIGHTS SLIM-RG3-5CCT



HIGHLIGHTS

3" Deep Regress Anti-glare Design Slim Light With Selectable CCT

- Class 2 transformer in junction box is included
- Easy & fast installation — install directly into ceiling with clips
- No housing required — Type IC, air tight & damp location rated
- Durable aluminum body with either adjustable gimbal / fixed aluminum body

8W

120V AC

550 LMN


80 CRI

CERTIFICATIONS



COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




SPECIFICATIONS

MODEL	SLIM-RG3-5CCT
Wattage	8W
Voltage	120V AC, 60Hz
Lumens	550 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	80
Rating	IC rated/Indoor use/ Damp Location
Grade of Protection	IP44
Cutout	Ø3-3/8" (86mm)
Operating Temperature	-20°C ~ +40°C

**ELEVATE
YOUR
LIGHTING
GAME**

5 YEAR WARRANTY


DIMENSIONS

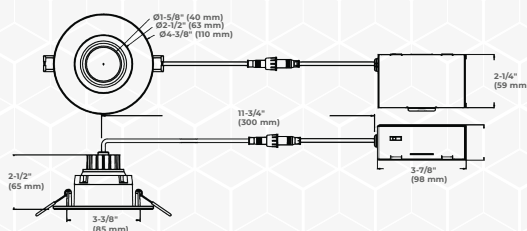


ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.



3" SLIM LIGHTS SLIM-RG3-5CCT

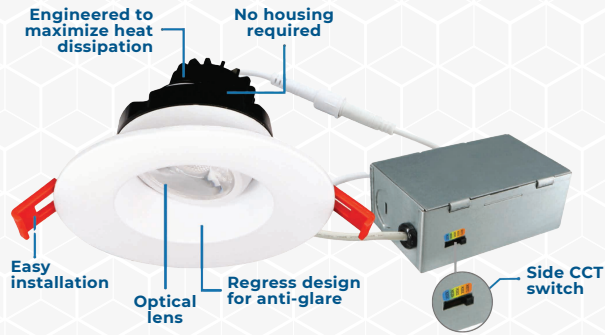

CUT HOLE SIZE

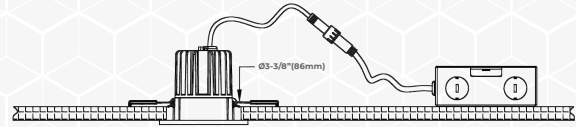

Cut Hole Size
Ø3-3/8" (86mm)

AVAILABLE FINISHES



ACCESSORIES (SOLD SEPARATELY)



CORD-24 | 60 | 120 | 240
Extension Cord

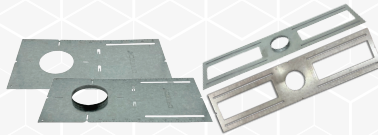


PLATE13-3A | PLATE13-3A-L | PLATE26-3A | PLATE26-3A-L
Construction plate made up of galvanized steel for recessed lighting




PLATE3A-HB
Galvanized steel mounting plate with hanger bars



DMD-ELV
Single pole 3 way dimmer



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted By:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

