

LED SLIM LIGHTS

SLIM6-5CCT

HIGHLIGHTS


6" Ultra Slim LED Downlight With Adjustable CCT

- Edge-lit Technology, No Glare Or Dark Spots, Instant-on
- No Existing Recessed Housing Or Junction Box Required
- Dimming: Triac Down To 10%
- I.C. Rated For Direct Contact With Insulation (indoor only)
- Suitable For Wet Location (indoor only)
- Rated For A Long Life - Over 50,000 Hours
- FT6 cable (plenum rated)
- 5-color Field Selectable CCT- 2700K, 3000K, 3500K, 4000K, 5000K



Easily flip the switch for desired CCT

DIMENSIONS

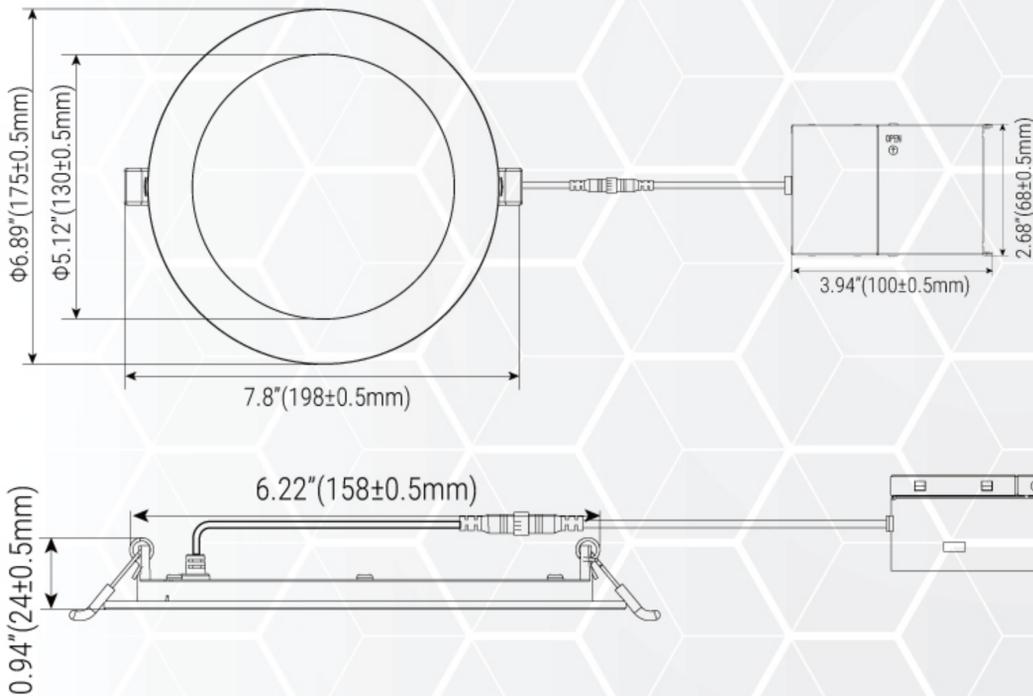

SPECIFICATIONS

Model	SLIM6-5CCT
Wattage	15W
Voltage	AC120V, 60Hz
Lumens	1300 lmn
Beam Angle	120°
Lifetime Warranty	50000 hours 5 years
Air Tight	Yes
Rating	IC rated Indoor location
Grade of Protection	Suitable For Wet Locations (indoor only)
CRI	90
Colour Temp.	2700K / 3000K / 3500K / 4000K / 5000K
Dimming	Triac Dimming
Operating Temp.	-20°C ~ +45°C
Case Quantities	18


LED SLIM LIGHTS

SLIM6-5CCT

INSTALLATION

- Suitable for most new constructions.
- Install J-Box in ceiling beam, and insert light right into drywall opening

Cut Hole Size
Ø6-19/64"(160mm)

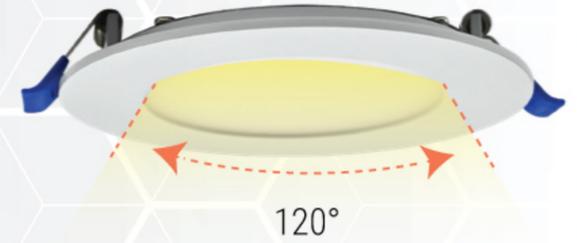

DECORATIVE TRIMS



SLIM6-RINGBK



SLIM6-RINGSN



SLIM6-RINGCH



SLIM6-RINGVB



SLIM6-RINGCBK

ACCESSORIES (SOLD SEPARATELY)

MOUNTING PLATE



**PLATE13-6, PLATE13-6-L,
PLATE26-6, PLATE26-6-L**
6" New Construction Plate made
up of galvanized steel for recessed
lighting



PLATE6-HB
Galvanized steel Mounting Plate with
hanger bars for ORTECH 6" LED
lights

FLEXIBLE CONNECTOR



CORD-B24/B120
Flexible Connector
2FT/10FT



Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.