

## 4" & 6" SLIM LIGHTS

### SLIM4FL+FR-5CCT | SLIM6FL+FR-5CCT

 2 HR Fire Rating



#### HIGHLIGHTS

#### 4" & 6" Fire Rated Floating Gimbal Recessed LED - with Adjustable CCT

- Reinforced and heat resistant steel casting providing 2-hour fire rating
- Junction box with commercial grade driver included
- Easy installation (no additional box required)
- FT6 cable (plenum rated)
- Tested & Certified to comply with UL 263-2011(R2022) & ASTM E119-20 & CAN/ULC-S101-14
- Rated for ceiling assemblies with up to 2 layers of drywall, each 5/8 inch, for a total of 1-1/4 inches
- Tested and certified for the following floor/ceiling assemblies: No. L505 and L556
- Must review compliance before installation



#### CERTIFICATIONS



#### COLOUR TEMPERATURE



2700K / 3000K / 3500K / 4000K / 5000K (Selectable)



#### SPECIFICATIONS

MODEL	SLIM4FL+FR-5CCT	SLIM6FL+FR-5CCT
<b>Wattage</b>	9W	15W
<b>Voltage</b>	120V AC, 60Hz	120V AC, 60Hz
<b>Lumens</b>	750 lmn	1000 lmn
<b>Beam Angle</b>	38°	38°
<b>Lifetime</b>	50,000 hours	50,000 hours
<b>Dimmable</b>	Yes (TRIAC dimming)	Yes (TRIAC dimming)
<b>CRI</b>	80+Ra	80+Ra
<b>Rating</b>	IC rated/Indoor use/ Damp Location	IC rated/Indoor use/ Damp Location
<b>Grade of Protection</b>	IP44	IP44
<b>Cutout</b>	Ø4-1/4" (108mm)	Ø5-1/2" (140mm)
<b>Operating Temperature</b>	-20°C ~ +40°C	-20°C ~ +40°C
<b>Case Quantities</b>	18	18

#### DIMENSIONS

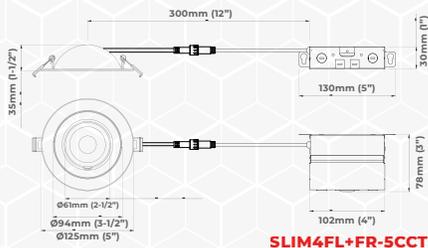


**5 YEAR WARRANTY**

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

## 4" & 6" SLIM LIGHTS

### SLIM4FL+FR-5CCT | SLIM6FL+FR-5CCT

#### INSTALLATION



#### CUT HOLE SIZE




**SLIM4FL+FR-5CCT**  
 Ø4-1/4" (108mm)  
**SLIM6FL+FR-5CCT**  
 Ø5-1/2" (140mm)

#### ACCESSORIES (SOLD SEPARATELY)



**CORD-B24 | B120**  
 Extension Cord

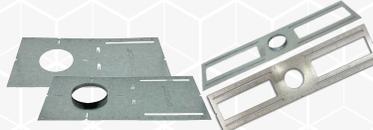



**PLATE13-4A | PLATE13-4A-L | PLATE26-4A | PLATE26-4A-L**  
**PLATE13-6 | PLATE13-6-L | PLATE26-6 | PLATE26-6-L**  
 Construction plate made up of galvanized steel for recessed lighting





**PLATE4A-HB**  
**PLATE6-HB**  
 Galvanized steel mounting plate with hanger bars

#### TESTING REPORT

##### SLIM4FL+FR-5CCT

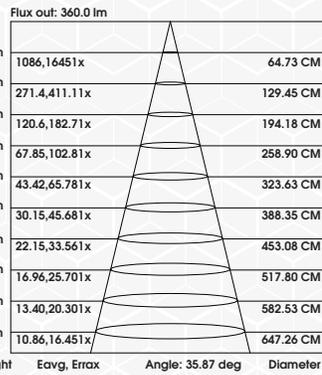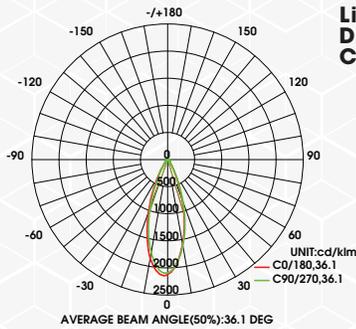

##### SLIM6FL+FR-5CCT

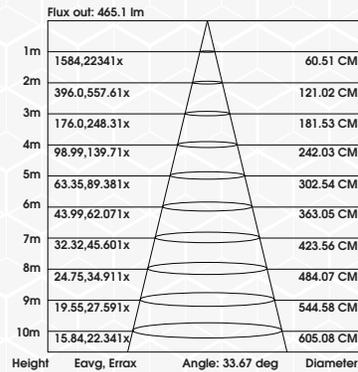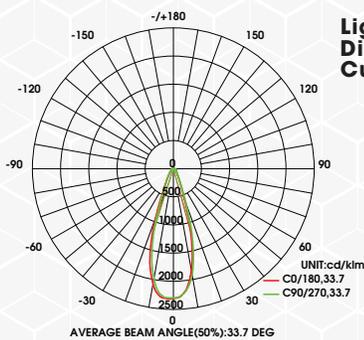

REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			<b>Project:</b>
			<b>Location:</b>
			<b>Architect:</b>
			<b>Engineer:</b>
			<b>Contractor:</b>
			<b>Submitted By:</b>
			<b>Date:</b>

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.