

Projet: Type:

**Slim Panel Multi-CCT 9W 120V 2700-3000-3500-4000-5000K**

Easy to install, the Speclite 4" gimbal recessed light features colour selection via a dip switch, allowing you to choose from 2700K à 5000K. Powered by 120V (AC), this recessed LED panel is available in White and Black. The gimbal can tilt 90 degrees (vertical) and rotate 360 degrees (horizontal). The fixture is airtight. Ideal for simplifying your residential lighting projects, this slim recessed LED panel offers an aesthetic and functional solution for any room, ensuring a lighting ambiance tailored to your client's needs.

**CARACTERISTICS**

- Integrated Multi-CCT selection: Easily adjust the color temperature to achieve lighting from 2700K to 5000K according to your needs.
- The gimbal can tilt 90 degrees (up and down) and rotate (left and right) 360 degrees. This allows for greater customization of the room's lighting.
- TRIAC Dimming: Compatible with most residential dimmers.
- Airtight: designed to prevent the infiltration of air into the building envelope, enhancing energy efficiency and ensuring the longevity of the fixture.



**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SP	4D	C	B	A	C	009	G	D	SY
Slim Panel	4"	clear	black	120V	2700-3000-3500-4000-5000K	9W	Gimbal	dim TRIAC	SY

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	900
CCT	2700-3000-3500-4000-5000K
ANGLE	36°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	16
LED VOLTAGE	12V
LED MAX CURRENT	0.6A
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Aluminium
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	0.40 KG
OPERATING TEMP.	-25°C ~ 40°C
APPLICATION	Indoor

**ELECTRICAL SPECIFICATIONS**


REAL POWER	9 W
VOLTAGE	120V
EFFICIENCY	100 lm/w
POWER FACTOR	N/A %
T.H.D	N/A %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cETL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	No
BARCODE	882110008370
ENVIRONMENTAL	IP44
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

<b>INSTALLATION</b>	Recessed
<b>CABLE LENGTH</b>	N/A

## DIMENSIONS

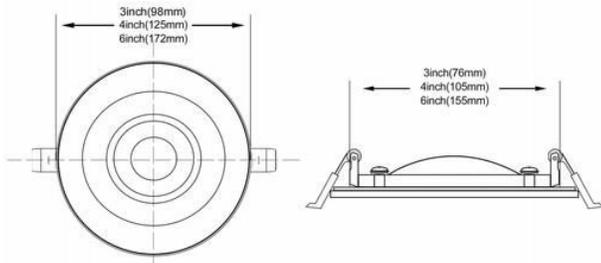

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
13.00 cm X 13.00 cm X 8.50 cm	67.00 cm X 36.00 cm X 28.00 cm	40	19.50 kg	600 
5 1/8 " X 5 1/8 " X 3 3/8 "	26 3/8 " X 14 1/8 " X 11 "		42.99 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7