

Projet:

Type:

Qté:

Slim Panel Multi-CCT 9W 120V 2700-3000-3500-4000-5000K

Easy to install, the SpecLite slim panel features a color selection option via a dip switch, allowing you to choose from 2700K à 5000K. Powered by 120V (AC), this recessed LED panel is available in three finishes (White, Black, and Brushed Nickel) and in two sizes (4" and 6"). Ideal for simplifying your residential lighting projects, this slim recessed LED panel offers an aesthetic and functional solution for any room, ensuring a lighting ambiance tailored to your client's needs.

CHARACTERISTICS

- Integrated Multi-CCT selection: Easily adjust the color temperature to achieve lighting from 2700K to 5000K according to your needs.
- Slim and minimalist design: Sleek profile designed to blend seamlessly into all types of spaces without compromising performance.
- TRIAC Dimming: Compatible with most residential dimmers.
- Soft and even lighting: Provides diffuse light, reducing glare and enhancing visual comfort.

**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SP	4D	F	B	A	C	009	0	D	SY
Slim Panel	4"	frost	black	120V	2700-3000-3500-4000-5000K	9W	N/A	dim TRIAC	SY

PHOTOMETRIC SPECIFICATIONS

LUMENS	750
CCT	2700-3000-3500-4000-5000K
ANGLE	180°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD2835
LED QTY	48
LED VOLTAGE	24V
LED MAX CURRENT	320mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium
HOUSING FINISH	Black
LENS MATERIAL	PMMA
LENS FINISH	Frost
WEIGHT	0.35 KG
OPERATING TEMP.	-20°C ~ 45°C

ELECTRICAL SPECIFICATIONS


REAL POWER	9 W
VOLTAGE	120V
EFFICIENCY	83.33 lm/w
POWER FACTOR	95 %
T.H.D	25 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	N/A
BARCODE	882110003740
ENVIRONMENTAL	IP44
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

APPLICATION	Indoor
INSTALLATION	Recessed
CABLE LENGTH	N/A

DIMENSIONS

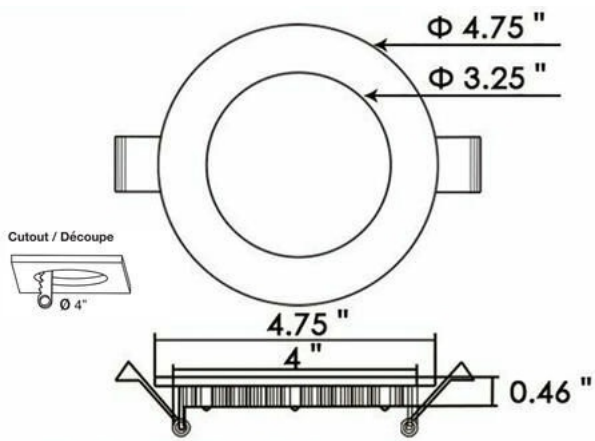

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
10.00 cm X 10.00 cm X 1.00 cm	58.00 cm X 44.00 cm X 30.00 cm	48	18.40 kg	576
3 7/8 " X 3 7/8 " X 0 3/8 "	22 7/8 " X 17 3/8 " X 11 3/4 "		40.57 lbs	



PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7