

Projet: _____ **Type:** _____

Slim Panel Multi-CCT 9W 120V 2700-3000-3500-4000-5000K

SpecLite's fire-resistant round recessed luminaire, with metal construction and steel clips, is capable of withstanding fire for at least 2 hours. In fact, it's UL263, ASTM E119 and CAN ULC S101 certified to give you peace of mind in the event of fire. This luminaire is integrated with a colour selection option via a dip switch allowing you to choose between 2700K, 3000K, 3500K, 4000K and 5000K. Powered by 120V (AC), this recessed LED luminaire is available in 3 finishes (White, Black and Brushed Nickel) and 2 formats (4" and 6"). Ideal for simplifying your residential lighting projects, this LED recessed luminaire offers an aesthetic and functional solution for any room, ensuring a lighting ambience tailored to your customer's needs.



CARACTERISTICS

- Certified to UL 263, ASTM E119 and CAN/ULC S101, this luminaire has passed the most rigorous tests for your peace of mind. It is fire-resistant for at least 2 hours.
- Integrated 3CCT selection: Easily adjust the color temperature to achieve lighting at 2700K, 3000K, 3500K, 4000K or 5000K according to your needs.
- TRIAC Dimming: Compatible with most residential dimmers.
- Slim and minimalist design: Sleek profile designed to blend seamlessly into all types of spaces without compromising performance.



NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SP	4D	F	W	A	C	009	F	D	SY
Slim Panel	4"	frost	white	120V	2700-3000-3500-4000-5000K	9W	Fire Rated 2H	dim TRIAC	SY

PHOTOMETRIC SPECIFICATIONS

LUMENS	810
CCT	27-30-35-40-50K
ANGLE	180°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	48
LED VOLTAGE	24V
LED MAX CURRENT	280-300mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium
HOUSING FINISH	White
LENS MATERIAL	PMMA
LENS FINISH	Frost
WEIGHT	0.35 KG
OPERATING TEMP.	-20°C ~ 45°C
APPLICATION	Indoor

ELECTRICAL SPECIFICATIONS


REAL POWER	9 W
VOLTAGE	120V
EFFICIENCY	90 lm/w
POWER FACTOR	95 %
T.H.D	25 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	No
BARCODE	882110007885
ENVIRONMENTAL	IP44
IK PROTECTION	N/A
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

INSTALLATION	Recessed
CABLE LENGTH	N/A

DIMENSIONS

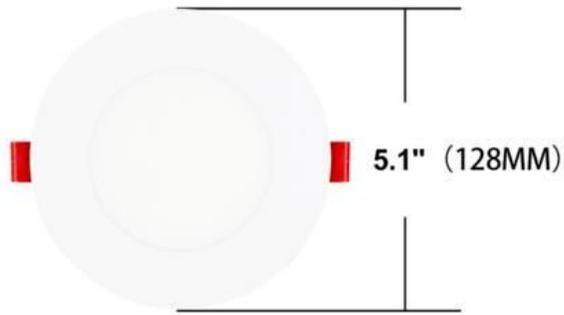

Opening size
4" (105MM)


PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
13.00 cm X 13.00 cm X 1.50 cm	54.00 cm X 43.00 cm X 28.00 cm	48	18.00 kg	864 
5 1/8" X 5 1/8" X 0 5/8"	21 1/4" X 16 7/8" X 11"		39.68 lbs	

PRODUCTS IMAGES



You Could Choose Your Favorite Color



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7