

Projet:	Type:	Qté:
---------	-------	------

Slim Panel 3CCT 20-15-12W 120V 2700-3000-3500-4000-5000K

Easy to install, the SpecLite slim panel features a color selection option via a dip switch, allowing you to choose from 2700K à 5000K. Powered by 120V (AC), this recessed LED panel is available in three finishes (White, Black, and Brushed Nickel) and in two sizes (4" and 6"). Ideal for simplifying your residential lighting projects, this slim recessed LED panel offers an aesthetic and functional solution for any room, ensuring a lighting ambiance tailored to your client's needs.

CHARACTERISTICS

- Integrated Multi-CCT selection: Easily adjust the color temperature to achieve lighting from 2700K to 5000K according to your needs.
- Slim and minimalist design: Sleek profile designed to blend seamlessly into all types of spaces without compromising performance.
- TRIAC Dimming: Compatible with most residential dimmers.
- Soft and even lighting: Provides diffuse light, reducing glare and enhancing visual comfort.



NOMENCLATURE

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
SP	8D	F	W	A	C	020	0	D	HM
Slim Panel	8"	frost	white	120V	2700-3000-3500-4000-5000K	20-15-12W	N/A	dim TRIAC	HM

PHOTOMETRIC SPECIFICATIONS

LUMENS	1,400
CCT	27-30-35-40-50K
ANGLE	120°
C.R.I.	80
DIMMABLE	Triac
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	128
LED VOLTAGE	36V
LED MAX CURRENT	45mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Aluminium
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Frost
WEIGHT	0.00 KG
OPERATING TEMP.	-10°C ~ 40°C

ELECTRICAL SPECIFICATIONS


REAL POWER	20 W
VOLTAGE	120V
EFFICIENCY	70 lm/w
POWER FACTOR	90 %
T.H.D	
FREQUENCY	

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	Energy Star
DLC ID	
FCC	No
BARCODE	882110007700
ENVIRONMENTAL	IP40
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	N/A
SURGE PROTECTION WITHOUT GROUNDING	N/A

APPLICATION	Indoor
INSTALLATION	Recessed
CABLE LENGTH	N/A

DIMENSIONS

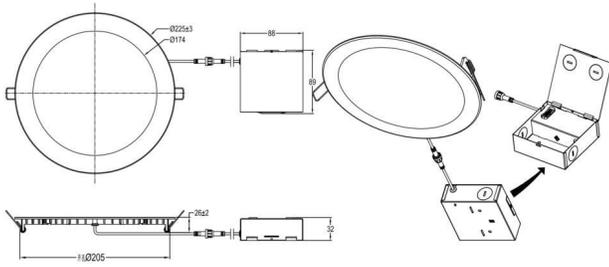

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
23.00 cm X 6.00 cm X 23.00 cm	48.10 cm X 33.10 cm X 26.00 cm	10	8.00 kg	420
9" X 2 3/8" X 9"	18 7/8" X 13" X 10 1/4"		17.64 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7