

Projet:	Type:	Qté:
---------	-------	------

LED constant Driver Sosen 277-480VAC 32-56VDC 320W

These drivers are among the most popular transformers for commercial and industrial lighting that require constant current drivers. You will also find a range of Speclite products specifically designed to be fully compatible with these drivers. For any questions or to receive guidance on selecting the ideal driver for your needs, please contact us.



CARACTERISTICS

-
-
-
-

NOMENCLATURE

SERIE	VER.
NA	
NA	

PHOTOMETRIC SPECIFICATIONS

LUMENS	0
CCT	
ANGLE	
C.R.I.	
DIMMABLE	
PHOTOCELL	
SENSOR	
LUMEN MAINTENANCE L70	
LED TYPE	
LED QTY	
LED VOLTAGE	
LED MAX CURRENT	
FLICKER	

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	
HOUSING FINISH	
LENS MATERIAL	
LENS FINISH	
WEIGHT	0.00 KG
OPERATING TEMP.	
APPLICATION	
INSTALLATION	
CABLE LENGTH	N/A


ELECTRICAL SPECIFICATIONS

REAL POWER	W
VOLTAGE	
EFFICIENCY	lm/w
POWER FACTOR	%
T.H.D	
FREQUENCY	

CERTIFICATIONS

REGULATORY LISTING	
EFFICIENCY LISTING	
DLC ID	
FCC	
BARCODE	882110007519
ENVIRONMENTAL	
IK PROTECTION	
SURGE PROTECTION WITH GROUNDING	
SURGE PROTECTION WITHOUT GROUNDING	

DIMENSIONS

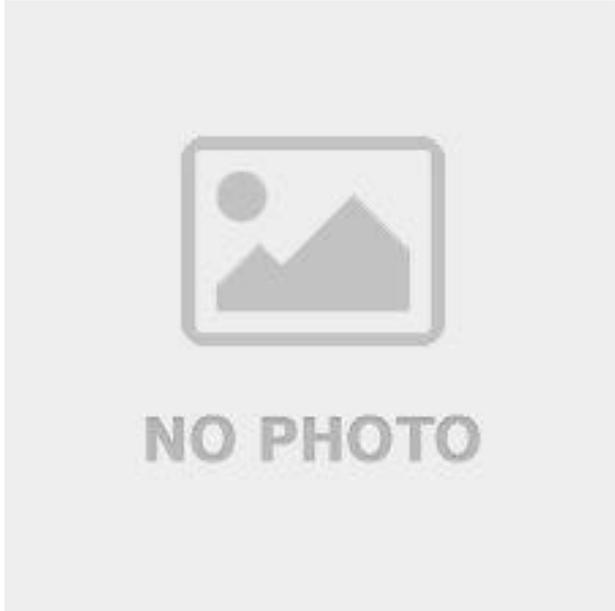

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
26.00 cm X 9.00 cm X 4.50 cm 10 1/4 " X 3 1/2 " X 1 3/4 "	N/A	N/A	0.00 kg 0.00 lbs	

PRODUCTS IMAGES

No Product images

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7