

# LED FIXTURE

## SSL Series



## LED Cylinder SSL-ESC

Selectable Wattage and Selectable Kelvin (CCT)  
120-347V auto-sensing driver



5-year limited warranty


Operating temperature range -40° C ~ +40° C



### Features & Benefits

- cULus listed, DLC, black finish
- Selectable Wattage
- 3 CCT selectable, 120-347V auto-sensing driver
- Ceiling Mtd., pendant Mtd., wall Mtd., and wall Mtd. up/ down available
- CRI 70+, PF 0.9
- Beam angle 45° default, 25° or 60° optional
- L70 @ 50,000 Hrs
- Wet location rated

### Dimensional Drawing

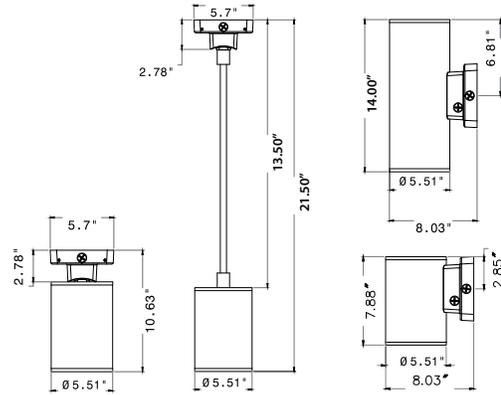

### Ordering Information SSL-ESC/W/20W/MK/120-347V/45D/BK

Family Name	Fixture Type	Mounting	Wattage	CCT	Voltage	Beam Angle*	Finish Color
SSL (Solid state lighting)	ESC (LED cylinder)	C (Ceiling Mtd.) P (Pendant Mtd.) W (Wall Mtd.) WUD (Wall Mtd. up/ down)	20W-10W 40W-20W (WUD)	MK (Selectable Kelvin/CCT)	120-347V	45D (45° Default) 25D, 60D (25°, 60° Optional)	BK (Black)

\* ESC/WUD, 45° up/ 45° down

### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Mounting	Case QTY.
3680330	Y	SSL-ESC/W/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Wall Mtd.	4
3680331	Y	SSL-ESC/C/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Ceiling Mtd.	4
3680332	Y	SSL-ESC/P/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Pendant Mtd.	4
3680333	-	SSL-ESC/WUD/20W/MK/120-347V/45D/BK	40-20	120-347V	50,000	2100 UPD/ 1050 UPD	30-40-50	≥70	Yes	Wall Mtd. up/ down	4
3660207	-	SSL-ESC/LENS/25D	25° lens								
3660209	-	SSL-ESC/LENS/60D	60° lens								