

# LED FIXTURE

SSL Series



## LED Glass Wall Pack SSL-WP1T

Impact Resistant Tempered Glass lens, 120-347V auto-sensing driver  
Selectable wattage and selectable kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +40° C



### Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Selectable CCT (30K/40K/50K), selectable wattage
- Junction box or wall mounted directly
- Die-cast aluminum with durable dark bronze or black coat finish
- Photocell sensor optional
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

### Dimensional Drawing

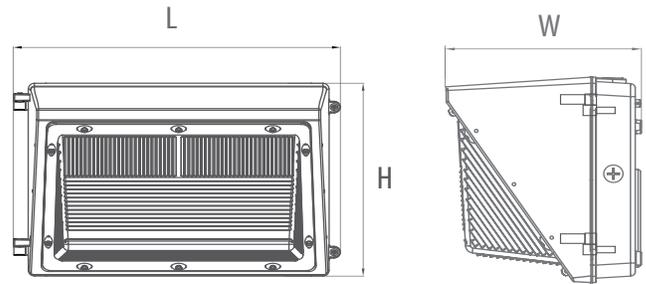

### Ordering Information Example: SSL-WP1T/60M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Dimmable	Finish	Options
SSL (Solid state lighting)	WP1T (LED glass wall pack)	40W 60M/MW (Max. 60W Selectable Wattage) 100L/MW (Max. 100W Selectable Wattage) 120XL/MW (Max. 120W Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze) BLK (Black)	Photocell

### Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	L70-Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3665318	-	SSL-WP1T/40W/MK/120-347V/D/DB	40	120-347V	50,000	5000	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3665319	-	SSL-WP1T/40W/MK/120-347V/D/BLK	40	120-347V	50,000	5000	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3680304	Y	SSL-WP1T/60M/MW/MK/120-347V/D/DB	60-40-28	120-347V	50,000	7200-4800-3360	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3680305	Y	SSL-WP1T/100L/MW/MK/120-347V/D/DB	100-90-80-70	120-347V	50,000	12000-10800-9600-8400	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3680359	Y	SSL-WP1T/120XL/MW/MK/120-347V/D/DB	120-100-75	120-347V	50,000	15000-12500-9375	30-40-50	≥80	Yes	14.3"x 9"x 7.8"	2
3660183	-	SSL-WP2T/LV/12V/PC	SSL, Low Voltage, 12V, Photocell (Button Type)								

SSL-WP2T/LV/12V/PC

