



3150 PROFILE

3000 Series

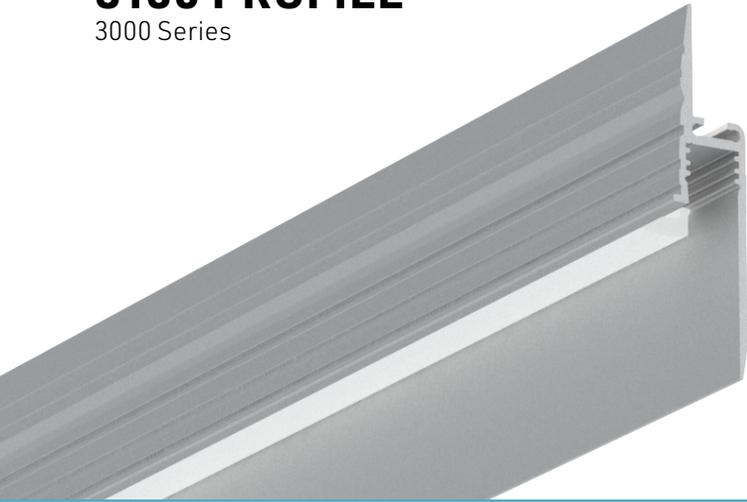

Cross-section dimensions:

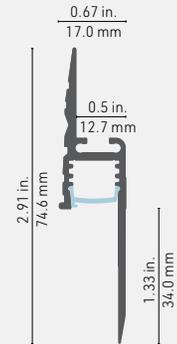

NEW! CONTOUR LIGHTING AT ITS BEST!

The ultimate in profiles that disappear completely into the wall surface, the 3150 is designed to provide downward lighting, 90° angle lighting. With a longer inner section than the 3100, this profile provides a greater surface area for light reflection, which optimizes safety applications in areas with poor or deficient lighting. Choice of two high-end lenses to ensure optimal light diffusion: the PRIME, which is rigid, or the new SiLens in flexible silicone, which can be installed with the touch of a finger. A new feature: it can be used with all type A joiners to build a solid structure. This profile fits 1/2" and 5/8" gypsum panels for a seamless finish. Ideal for residential or commercial applications.

FEATURES

- Available in 96 in (2.43 m) lengths for easy and accurate on-site installation
- Direct fit with standard 1/2" and 5/8" gypsum panels
- 60% longer reveal than the 3100 profile
- Impeccable finish thanks to the grooves that allow the profile to be levelled with joint compound
- Choice of high-end optics: PRIME lens or SiLens, made of flexible silicone, which can be installed with the touch of a finger
- LED light sources in 8 mm (1.5 W/ft, 2.93 W/ft, and 4.5 W/ft) with 7 colour temperatures (2400 K to 5000 K) and in 10 mm (4.4 W/ft & 5.9 W/ft RGB and 7.0 W/ft HOS)
- Application guide for light sources 10 mm (0.394") or less in IP22
- Indoor use

OPTIONS



LED ENGINE COMPATIBILITY

Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.3923lbs/ft, 583.81g/m (without lens)







NEW SMALL FLAT HEAD SCREW!

Our new small flat head screw fits perfectly into the V-groove of profile 3150 and other adapted profiles. This gypsum screw does not require the use of a milling cutter. Installation is faster and requires less drywall to finish, saving time and material.

FEATURES

- Compatible with 3000 Series profiles and 8870 extrusion
- Head 35% smaller than standard gypsum screws
- Use with Robertson-tip screwdriver #2 (red)
- 100 units per pack

An ingenious tools to enhance your creative ideas and be more efficient!



1 Finish	2 Optics	3 Quantity
CA3150	-	96" x

1 FINISH	2 OPTICS	3 QUANTITY
CA3150 - Anodized aluminum finish	DRS - Prime lens DSS - Silicone lens DNO - No lens	This profile is shipped in straight sections of 96". Specify quantity of sections required.

ACCESSORIES (OPTIONAL)	Quantity
J50 - Joiner straight (type A)	
JH135 - Joiner horizontal 135° (Type A)	
JH90 - Joiner horizontal 90° (Type A)	
Drywall small head screw x100	
ECNL - Left end cap, alu.	
ECNR - Right end cap, alu	

 **STATIC WHITE / WARM DIM**

4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Length, in	10 Driver Type
AID						

4 LUMEN PACKAGE	5 CCT	6 APPLICATION	7 POWER FEED	8 INPUT / OUTPUT	9 LENGTH	10 DRIVER TYPE
LP100 - 1.5 W/ft - >130 lm/ft LP200 - 2.9 W/ft - >200 lm/ft LP300 - 4.4 W/ft - >300 lm/ft LP450 - 5.8 W/ft - >450 lm/ft LP750** - 7.0 W/ft - >550 lm/ft PRECISE LE150* - 1.5 W/ft - >150 lm/ft LE300 - 3.0 W/ft - >300 lm/ft LE600 - 5.5 W/ft - >600 lm/ft NEAT LT150* - 2.0 W/ft - >150 lm/ft LT300 - 3.0 W/ft - >300 lm/ft LW2229 - WARMDIM 2200-2900K - 4.4 W/ft - 192 lm/ft LW2735 - WARMDIM 2700-3500K - 4.4 W/ft - 202 lm/ft LWC2230 - WARMDIM COB 2200-3000K - 4.4 W/ft - 323 lm/ft	K24 - 2400K K27 - 2700K K30 - 3000K K35 - 3500K K40 - 4000K **K50 - 5000K (LP750 only) *LE150 and LT150 are only available in K27 and K30	AID - Indoor dry locations	FH3 - Hardwire, 3ft wire FH6 - Hardwire, 6ft wire FH9 - Hardwire, 9ft wire FHX - Hardwire, custom length	WSE - Simple lead-in, end feed WPE - Pass-through, end feed	Length in inches of the LED tape (will be adjusted according to the tape section cut increment).	PND - Non-dimmable P010 - 0-10V dimming PPH - Phase (ELV / MLV) dim. P5i1 - 5in1 (Phase / 0-10V) dim. PDAL - DALI compatible driver PDMX - DMX driver PNO - No driver

 **TUNABLE WHITE / RGB / RGBW**

4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Length, in	10 Driver Type
AID						

4 LUMEN PACKAGE	5 CCT	6 APPLICATION	7 POWER FEED	8 INPUT / OUTPUT	9 LENGTH	10 DRIVER TYPE
LDWM2465 - Dual White - 3.5 W/ft - 260 lm/ft LDWH2465 - Dual White - 5.8 W/ft - 427 lm/ft LRGBLD - RGB - 4.4 W/ft - low density LRGBMD - RGB - 5.8 W/ft - medium density	2400-6500K N/A	AID - Indoor dry locations	FH3 - Hardwire, 3ft wire FH6 - Hardwire, 6ft wire FH9 - Hardwire, 9ft wire FHX - Hardwire, custom length	WSE - Simple lead-in, end feed WPE - Pass-through, end feed	Length in inches of the LED tape (will be adjusted according to the tape section cut increment).	PND - Non-dimmable PDMX - DMX driver PNO - No driver