


4200 PROFILE

4000 Series



Cross-section dimensions:

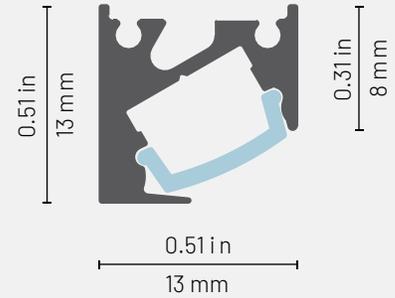

NEW! ELEGANCE AND DISCRETION

Our range of ultra-compact profiles has been expanded! The 4200 profile provides accent lighting at an angle of 30° to highlight products on shelves or to cut out the underside of cabinets. A notch on the underside completely conceals the TR64 mounting wire, giving the luminaire an even more aesthetic look. Ideal for commercial or residential applications.

FEATURES

- Ultra-compact aluminum profile: 13 mm x 13 mm (1/2" x 1/2")
- Custom length from 2 to 240 inches (6 m)
- 30° lighting angle
- 3 lumen packages: LP1 (160 lm/1.5 W/ft), LP2 (255 lm/3.0 W/ft) and LP3 (308 lm/4.5 W/ft) in a width of 5 mm
- Notch concealing the TR64 mounting wire
- Surface installation with 3M double-sided tape
- Offered in hardwire only
- Indoor use, IP22
- Designed to meet North American woodworking standards

OPTIONS




LED STRIP COMPATIBILITY

Compatible with LED strips up to **5mm** wide.

LINEAR WEIGHT

0.0442 lbs/ft, 0.066 kg/m (without lens)




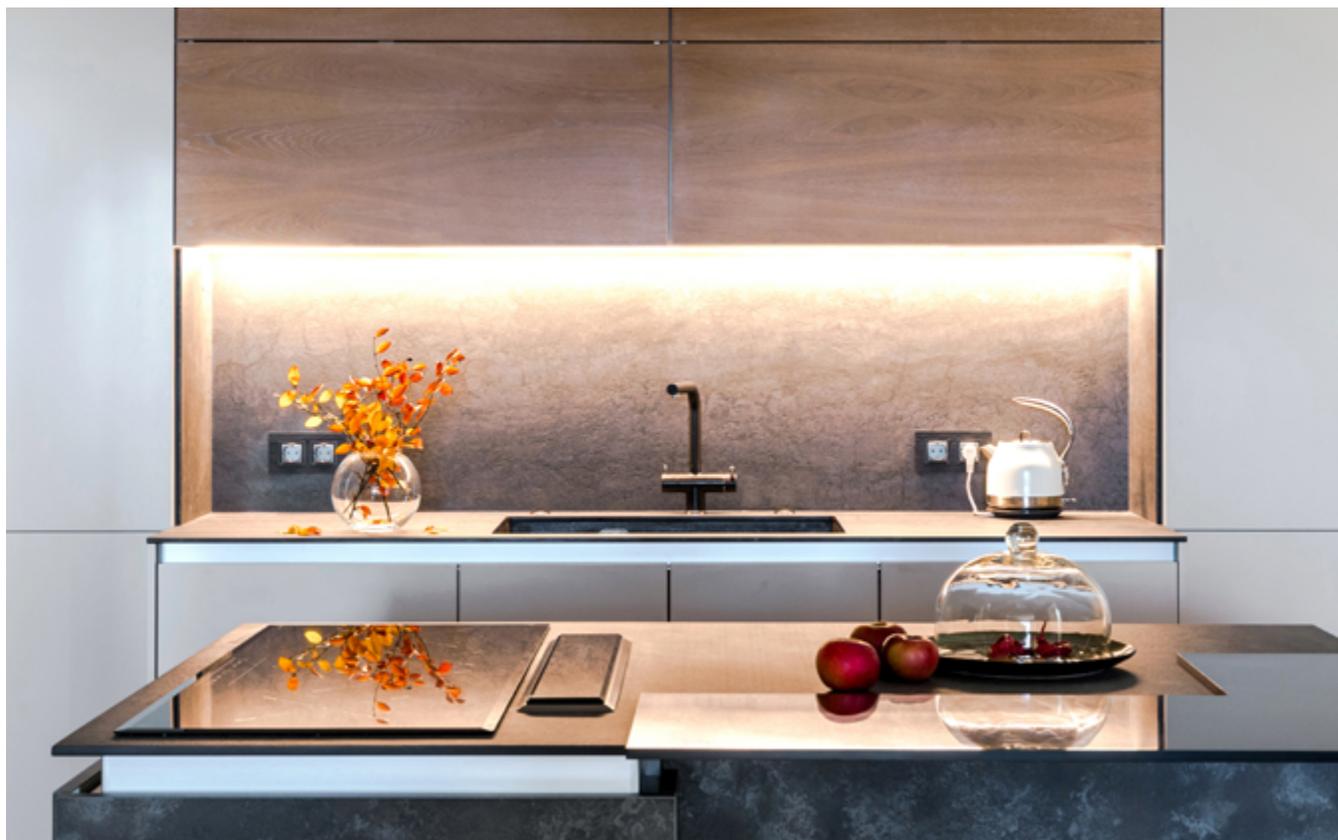




INTELLIGENT DESIGN

A notch on the underside completely conceals the TR64 mounting wire, giving the luminaire an even more aesthetic look. The encaps are also pass-through and the extrusion has been designed with a recess to insert the mounting tape.

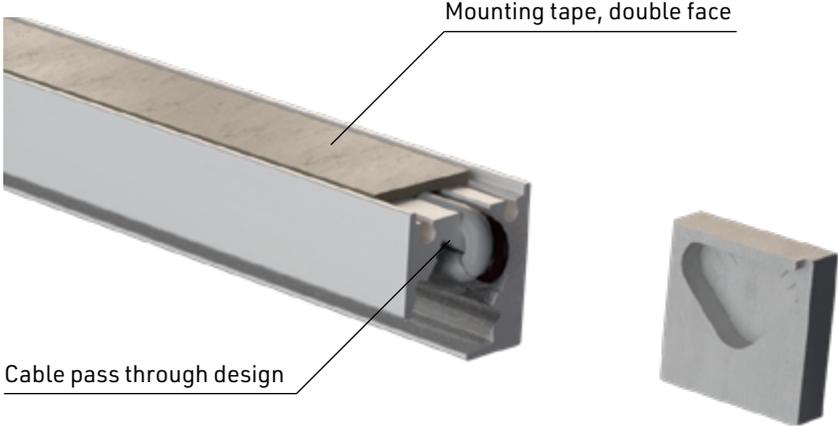

1 Finish	2 Mounting	3 Optics	4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Exact / Optimal	10 Length, in	11 Driver Type
-	-	-	-	-	AID	-	-	-	-	-

1 PROFILE & FINISH CA4200 - Anodized aluminum finish CA4201 - Anodized black finish CA420W - White (special order) CA420X - Custom color provide RAL #	2 MOUNTING M3M - Double face mounting tape MND - No mounting	3 OPTICS DXS - Optiflex lens DNO - No lens	4 LUMEN PACKAGE LP100 - 1.5 W/ft - >130 lm/ft LP200 - 2.9 W/ft - >200 lm/ft LP300 - 4.4 W/ft - >300 lm/ft PRECISE LE150* - 1.5 W/ft - >150 lm/ft LE300 - 3.0 W/ft - >300 lm/ft LE600 - 5.5 W/ft - >600 lm/ft NEAT LT150* - 2.0 W/ft - >150 lm/ft LT300 - 3.0 W/ft - >300 lm/ft	5 CCT K24 - 2400K K27 - 2700K K30 - 3000K K35 - 3500K K40 - 4000K *LE150 and LT150 are only available in K27 and K30	6 APPLICATION AID - Indoor dry locations
7 POWER FEED FH3 - Hardwire, 3ft wire FH6 - Hardwire, 6ft wire FH9 - Hardwire, 9ft wire FHX - Hardwire, custom length wire FC3 - DC plug, 3ft wire FC6 - DC plug, 6ft wire FC9 - DC plug, 9ft wire FCX - DC plug, custom length wire	8 INPUT / OUTPUT WSE - Simple lead-in, end feed WSB - Simple lead-in, back feed WPE - Pass-through, end feed WPB - Pass-through, back feed	9 EXACT/OPTIMAL QE - Exact QO - Optimal Exact - length specified in section 10 with end caps without flanges. Optimal - length specified in section 10, rounded down to the closest LED cut section to minimize dark spots.	10 LENGTH* Length of the luminaire in inches. *Includes end caps, excludes flanges (when applicable). 	11 DRIVER TYPE PND - Non-dimmable P010 - 0-10V dimming PPH - Phase (ELV / MLV) dimming P5i1 - 5-in-1 (Phase / 0-10V) dimming PDAL - DALI compatible driver PDMX - DMX driver PNO - No driver	

