


5350 PROFILE

5000 Series



Cross-section dimensions:

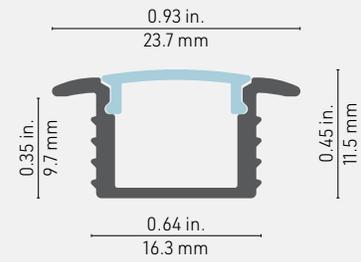

A COMPACT RECESSED PROFILE

Here is a **compact recessed** profile allowing you to make the light source and the LED invisible. The edges on each side of this extrusion allow a recessed installation, giving it style with a discreet and neat appearance. This profile will **fit in a 5/8 inch** deep recess.

FEATURES

- Designed to give a uniform light without hot spots with an opal or prime lens*.
- Designed for a snug fit in a 5/8-inch (16mm) wide, 3/8-inch (10mm) deep recess.
- Custom length by sections of 96 inches (2.44m).
- Made of ALCOA 6063-T5 aluminum alloy increasing heat dissipation.
- Its use increases the lifetime of your LED engine.
- Compatible with multiple installation accessories.
- Designed to meet North American woodworking standards.

OPTIONS



LED ENGINE COMPATIBILITY

IP22: Compatible with LED engines up to **10mm** wide.

LINEAR WEIGHT

0.110 lbs/ft, 0.164 kg/m (without lens)


*Dot free only in certain configurations - contact your sales representatives for information




1 Finish	2 Mounting	3 Optics	4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Exact / Optimal	10 Length, in	11 Driver Type
-	-	-	-	-	-	-	-	-	-	-

1 PROFILE & FINISH CA5350 - Anodized aluminum finish CA5351 - Anodized black finish CA535W - White (special order) CA535X - Custom color provide RAL #	2 MOUNTING M3M - Double face mounting tape MND - No mounting	3 OPTICS DOS - Opal lens DRS - Prime lens DBS - Black lens DNO - No lens	4 LUMEN PACKAGE LP100 - 1.5 W/ft - >130 lm/ft LP200 - 2.9 W/ft - >200 lm/ft LP300 - 4.4 W/ft - >300 lm/ft LP450 [†] - 5.8 W/ft - >450 lm/ft LP750 ^{†**} - 7.0 W/ft - >550 lm/ft PRECISE LE150* - 1.5 W/ft - >150 lm/ft LE300 - 3.0 W/ft - >300 lm/ft LE600 - 5.5 W/ft - >600 lm/ft NEAT LT150 ^{†*} - 2.0 W/ft - >150 lm/ft LT300 [†] - 3.0 W/ft - >300 lm/ft	5 CCT K24 - 2400K K27 - 2700K K30 - 3000K K35 - 3500K K40 - 4000K **K50 - 5000K (LP750 only) *LE150 and LT150 are only available in K27 and K30	6 APPLICATION AID - Indoor dry locations AIW - Indoor wet locations For wet location applications, LED strip will be put inside a waterproof silicone sheath. [†] AIW option is not available for this selection
---	---	---	---	--	--


LW2229 [†] - WARM DIM 2200-2900K - 4.4 W/ft - 192 lm/ft
LW2735 [†] - WARM DIM 2700-3500K - 4.4 W/ft - 202 lm/ft
LWC2230 [†] - WARM DIM COB 2200-3000K - 4.4 W/ft - 323 lm/ft

7 POWER FEED FH3 - Hardwire, 3ft wire FH6 - Hardwire, 6ft wire FH9 - Hardwire, 9ft wire FHX - Hardwire, custom length wire	8 INPUT / OUTPUT WSE - Simple lead-in, end feed WSB - Simple lead-in, back feed WPE - Pass-through, end feed WPB - Pass-through, back feed	9 EXACT/OPTIMAL QE - Exact QO - Optimal Exact - length specified in section 10 with end caps without flanges. Optimal - length specified in section 10, rounded down to the closest LED cut section to minimize dark spots.	10 LENGTH* Length of the luminaire in inches. <i>*Includes end caps, excludes flanges (when applicable).</i> 	11 DRIVER TYPE PND - Non-dimmable P010 - 0-10V dimming PPH - Phase (ELV / MLV) dimming P5i1 - 5-in-1 (Phase / 0-10V) dimming PDAL - DALI compatible driver PDMX - DMX driver PNO - No driver
---	---	--	---	--

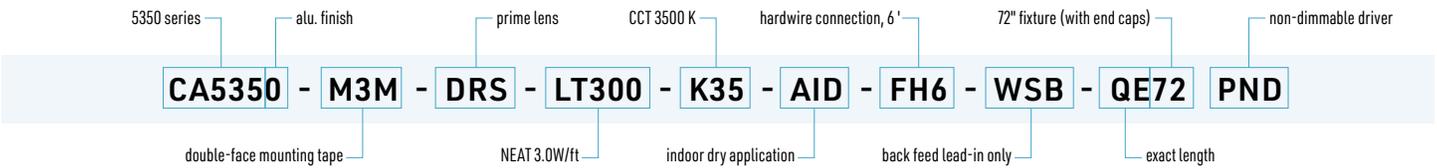

1 Finish	2 Mounting	3 Optics	4 Lumen Package	5 CCT	6 Application	7 Power Feed	8 Input / Output	9 Exact / Optimal	10 Length, in	11 Driver Type
-	-	-	-	AID	-	-	-	-	-	-

1 PROFILE & FINISH CA5350 - Anodized aluminum finish CA5351 - Anodized black finish CA535W - White (special order) CA535X - Custom color provide RAL #	2 MOUNTING M3M - Double face mounting tape MND - No mounting	3 OPTICS DOS - Opal lens DRS - Prime lens DBS - Black lens DNO - No lens	4 LUMEN PACKAGE LDWM2465 - Dual White - 3.5 W/ft - 260 lm/ft LDWH2465 - Dual White - 5.8 W/ft - 427 lm/ft LRGBLD - RGB - 4.4 W/ft - low density LRGBMD - RGB - 5.8 W/ft - medium density	5 CCT 2400-6500K N/A	6 APPLICATION AID - Indoor dry locations
---	---	---	---	-----------------------------------	--

7 POWER FEED FH3 - Hardwire, 3ft wire FH6 - Hardwire, 6ft wire FH9 - Hardwire, 9ft wire FHX - Hardwire, custom length wire	8 INPUT / OUTPUT WSE - Simple lead-in, end feed WSB - Simple lead-in, back feed WPE - Pass-through, end feed WPB - Pass-through, back feed	9 EXACT/OPTIMAL QE - Exact QO - Optimal Exact - length specified in section 10 with end caps without flanges. Optimal - length specified in section 10, rounded down to the closest LED cut section to minimize dark spots.	10 LENGTH* Length of the luminaire in inches. <i>*Includes end caps, excludes flanges (when applicable).</i>  length	11 DRIVER TYPE PND - Non-dimmable PDMX - DMX driver PNO - No driver
---	---	--	---	---

