


INSTALLATION - PUCK LIGHTS


⚠ WARNING

1. Only qualified electricians should install this luminaire. All electrical and grounded connections MUST be in accordance with National Electrical Code and the Canadian Electrical Code, and any applicable local code requirements.
2. In case of smoke, or spark emerging from the wire, please turn off the power supply to the wire immediately and notify the relevant personnel.
3. This fixture is suitable for DRY locations and it should not be exposed to water or moisture contact.
4. Please do not stare directly at the LED Lights, and wear gloves before installing the fixture to avoid an injury.
5. Please inspect the fixture for probable damages (arising from shipment) before installing and contact ARANI immediately.
6. Please confirm all accessories are included in the box and read the installation instructions carefully prior to installing the fixture.
7. This fixture is designed to operate in ambient temperatures ranging from -20° to 40°C. Using it in temperatures outside this range will reduce its lifespan.
8. Switch OFF the main power supply (at the fuse/ circuit breaker) before wiring-in the fixture.
9. Please clean the luminaire regularly to ensure maintenance and its longevity.


Product Dimensions

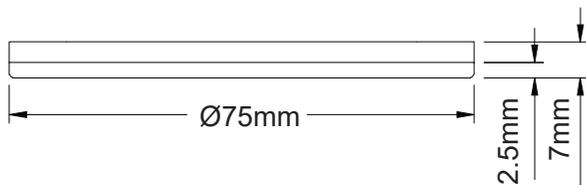

Surface Mounting

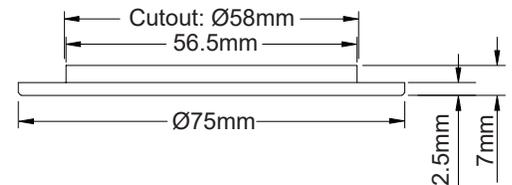


Recessed Mounting

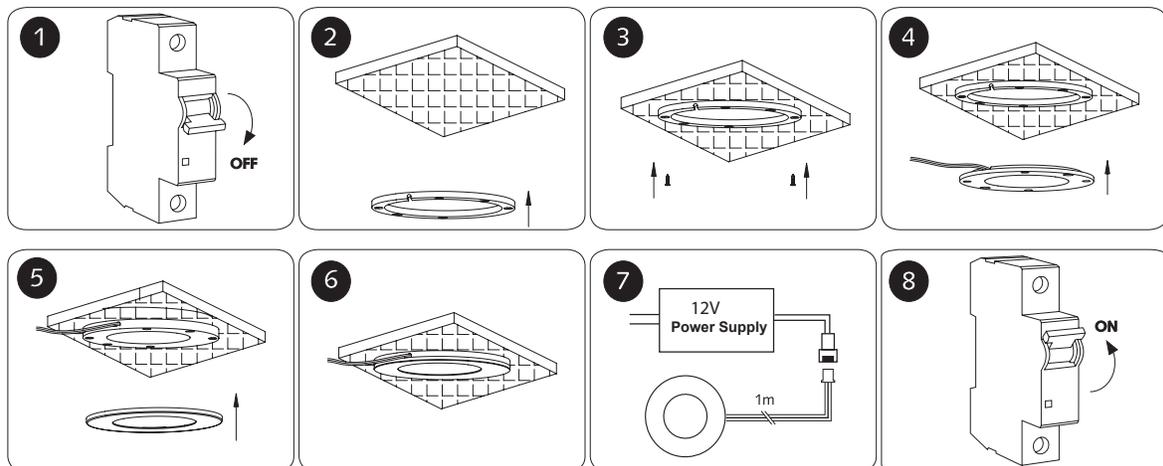

Surface Mounting Installation

- Turn off the breaker to disconnect the power circuit.
- Choose the installation location and ensure the surface is clean and flat. Position the mounting bracket.
- Secure the bracket to the surface using screws.
- Install the LED module and feed the cable through the notch in the side of the bracket.
- Position the trim on the LED module so that the two magnetize.
- Check that the light is properly aligned and firmly mounted.
- Connect the LED puck light to a 12V power supply only, maintaining a 1m distance as necessary.
- Turn the breaker back on and verify proper operation of the light.

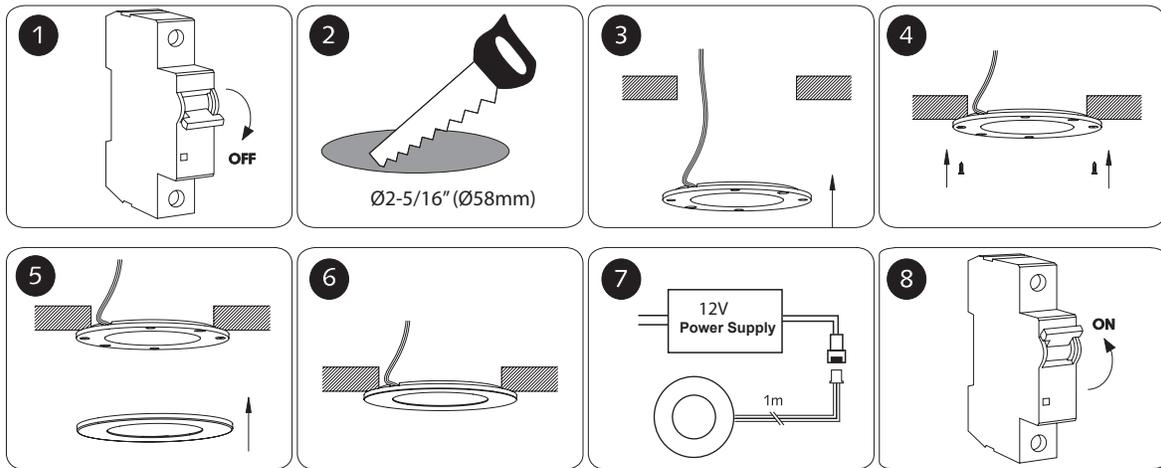

Recessed Installation

- Turn off the breaker to disconnect the power circuit.
- Cut a 2-5/16" (58mm) diameter hole in the desired location.
- Insert the LED module into the hole and feed the cable through it.
- Screw in the LED module using the screws included in the kit.
- Finish the installation by magnetizing the finishing trim.
- Check that the spotlight is properly aligned and firmly mounted.
- Connect the spotlight to a 12V power supply only.
- Turn the breaker back on and test the light.