

Installation Instruction

LED PS30 Lamp

Applicable models:
VIV-PS30/36W/XX/EX39


Model No.	Input Ratings	Dimmable	Power Factor	Socket type
VIV-PS30/36W/27/EX39	120-277V,60Hz,36W	YES	0.9	E39
VIV-PS30/36W/30/EX39	120-277V,60Hz,36W	YES	0.9	E39
VIV-PS30/36W/40/EX39	120-277V,60Hz,36W	YES	0.9	E39
VIV-PS30/36W/50/EX39	120-277V,60Hz,36W	YES	0.9	E39

- If the traditional lamp is a HID, you may need to cancel ballast change the circuit.
- TO AVOID FIRE SHOCK OR DEATH, PLS TURN OFF POWER at circuit breaker and test that power is off before wiring!
- NOT FOR EMERGENCY LIGHTING
- WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminares electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- WARNING – Risk of fire or electric shock. Install this kit only in the luminares that have the construction features and dimensions shown in the photographs and/or drawings.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.


INSTALLATION STEP:

Step 1: DISCONNECT POWER BEFORE SERVICING

Step 2: Remove existed lamp

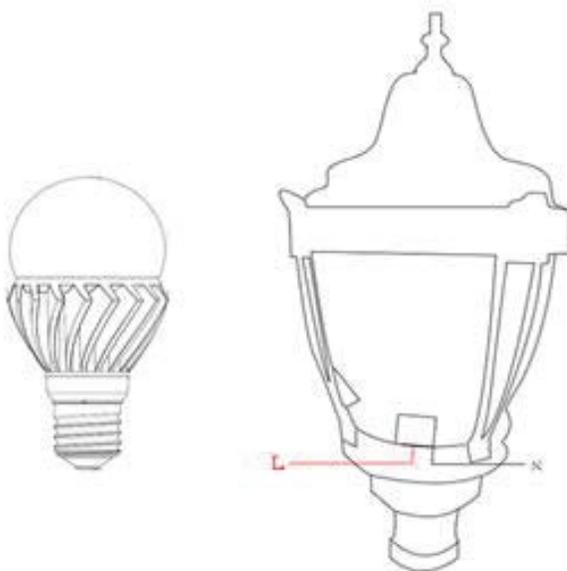

Step 3: If the traditional lamps is a HID,you will need to cancel the trigger and rectifier,change the circuit

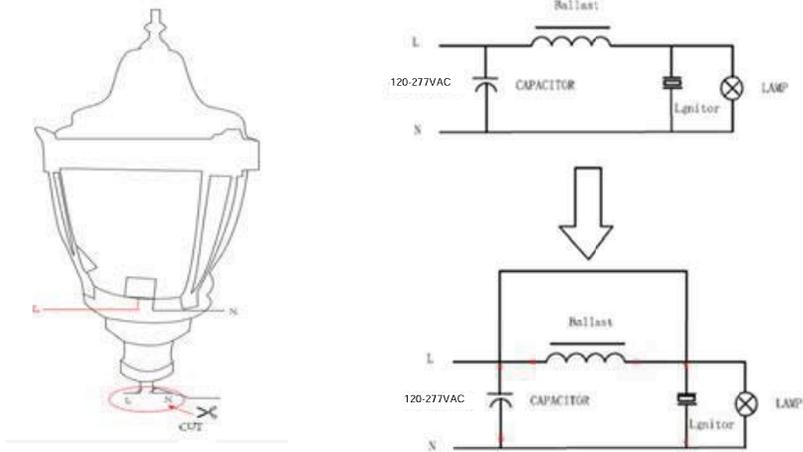

Step 4: Install the LED lamp.

Step 5: Check the steps above, and turn on the power supply.