

LED LAMP

VIVID Series



LED T8 BYPASS GLASS TUBE VIV-T8BP7



5-year limited warranty

Operating temperature range -20 °C ~ +45 °C




Features & Benefits

- cUL listed, DLC approved
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Glass, double-ended installation
- Our safety features allow for installation as well as misapplication protection¹
- High CRI (83+), beam angle 220°
- 50,000 hour life (L70), 120-277V

¹Contact your local Turolight representative for detail

Dimensional Drawing

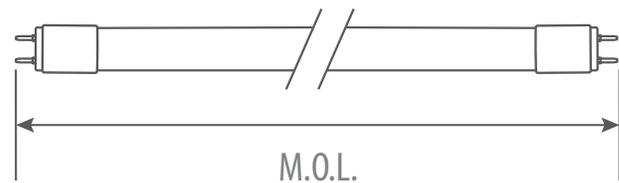

Ordering Information Example: VIV-T8BP7/12W/40/F/DE

Family Name	Lamp Type	Wattage	CCT	Frost	Installation
VIV (Vivid)	T8BP7	12W 15W	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	F (Frost)	DE (Double-ended)

Product Specification

Ordering Code	DLC	Model Number	Watts (W)	Voltage (V)	Initial Lumen (lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
T8 Bypass, Glass, 50000hrs, Double-ended, DLC												
1752230	Yes	VIV-T8BP7/12W/30/F/DE (4FT)	12	120-277	1700	G13	50,000	220°	3000	83	48	25
1752313	Yes	VIV-T8BP7/12W/35/F/DE (4FT)	12	120-277	1800	G13	50,000	220°	3500	83	48	25
1752428	Yes	VIV-T8BP7/12W/40/F/DE (4FT)	12	120-277	1800	G13	50,000	220°	4000	83	48	25
1752515	Yes	VIV-T8BP7/12W/50/F/DE (4FT)	12	120-277	1800	G13	50,000	220°	5000	83	48	25
1752231	Yes	VIV-T8BP7/15W/30/F/DE (4FT)	15	120-277	2100	G13	50,000	220°	3000	83	48	25
1752314	Yes	VIV-T8BP7/15W/35/F/DE (4FT)	15	120-277	2200	G13	50,000	220°	3500	83	48	25
1752429	Yes	VIV-T8BP7/15W/40/F/DE (4FT)	15	120-277	2200	G13	50,000	220°	4000	83	48	25
1752516	Yes	VIV-T8BP7/15W/50/F/DE (4FT)	15	120-277	2200	G13	50,000	220°	5000	83	48	25