

# T8 LED Bypass


VIV-T8BPBL/11.5W/SD/120-347V (4FT)



Bypass ballast (type B)

120-347V

Single & Double ended wiring

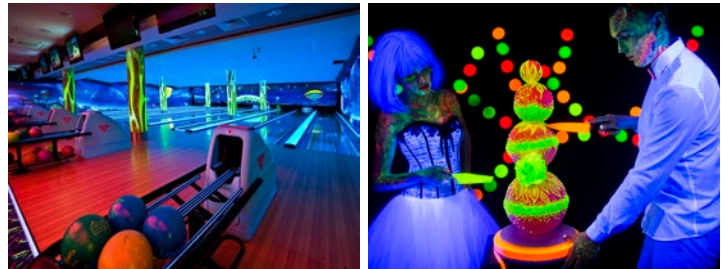

## Features & Benefits

4FT, cUL listed

High UV transmittance glass

UV wavelength 365nm


Beam angle 220°, 20000 hours life (L70)

2-year limited warranty

Operating temperature range -20 °C ~ +45 °C

External ballast not required, use existing lamp holders (non-shunted / shunted)

## Dimensional Drawing

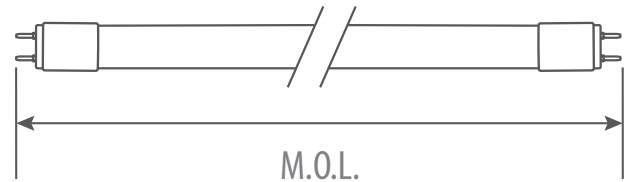

## Ordering Information Example: VIV-T8BPBL/11.5W/SD/120-347V

| Family Name | Lamp Type           | Wattage | Installation               | Voltage  |
|-------------|---------------------|---------|----------------------------|----------|
| VIV (Vivid) | T8BPBL (Blacklight) | 11.5W   | SD (Single & Double Ended) | 120-347V |

## Product Specification

| Ordering Code | Model Number                       | Wattage (W) | Voltage (V) | Peak wavelength (nm) | UVA OUT(1m) (μw/cm²) | Base | Hour Rating | Beam Angle | M.O.L. (inch) | Case QTY. |
|---------------|------------------------------------|-------------|-------------|----------------------|----------------------|------|-------------|------------|---------------|-----------|
| 1752004       | VIV-T8BPBL/11.5W/SD/120-347V (4FT) | 11.5        | 120-347     | 365                  | 33                   | G13  | 20,000      | 220°       | 48            | 10        |