

Volumetric Troffer

Power Selectable | Colour Selectable | 120-347V

Ideal for commercial lighting areas such as offices, retail spaces, hallways, healthcare applications, and more



Colour Selectable
3000K / 3500K / 4000K

Power Selectable
20W / 30W / 40W

Measures 2'x 2'



Seismic Mounting
Clips Included

120-347V
Universal Driver
0-10V dimmable

Meets / Exceeds
DLC 5.1 Glare Standards for
Increased Visual Comfort

Optional Accesories (sold separately):
Emergency LED Driver



BLD-YT08D

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	124 lm/W
CCT	3000K / 3500K / 4000K
CRI	86
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year
Factory Settings	40W 4000K

LUMEN OUTPUT			
	3000K	3500K	4000K
20W	2760 lm	2840 lm	2780 lm
30W	3930 lm	4050 lm	3960 lm
40W	5008 lm	5140 lm	5063 lm

APPROVALS AND LISTINGS

cETL	5000444
DLC	S-6KDAG7

ILLUMINANCE AT A DISTANCE

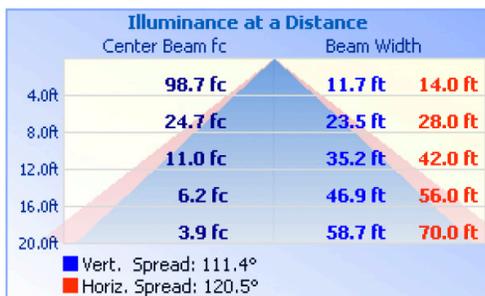

ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Power Factor	0.93
THD	17%
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Cover	Polycarbonate
Finish	White
IP Rating	IP20
Net Weight	11.46 lbs
Gross Weight	14.11 lbs
Carton Qty	2
Carton Dimensions	25.5 x 5.5 x 25.7 in

ACCESSORIES (Ordered Separately)

Emergency LED Driver	BLD-YT08D
----------------------	-----------

DIMENSIONS

