

Volumetric Troffer

Power Selectable | Colour Selectable | 120-347V

Ideal for commercial lighting areas such as offices, retail spaces, hallways, healthcare applications, and more



Optional Accesories (sold separately):
Emergency LED Driver



BLD-YT08D

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	122 lm/W
CCT	3000K / 3500K / 4000K
CRI	86
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	5-year
Factory Settings	40W 4000K

LUMEN OUTPUT			
	3000K	3500K	4000K
30W	3960 lm	4080 lm	3990 lm
35W	4515 lm	4655 lm	4550 lm
40W	5025 lm	5190 lm	5086 lm

APPROVALS AND LISTINGS

cETL	5000444
DLC Premium	S-PYCOWM

ILLUMINANCE AT A DISTANCE

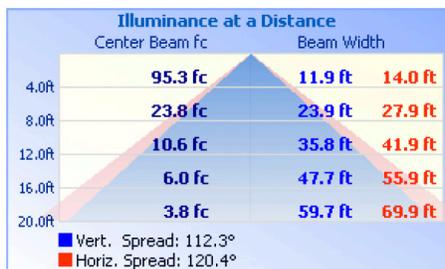

ELECTRICAL

Wattage	30W/35W/40W
Voltage	120-347V
Power Factor	0.91
THD	20.2%
Operating Temp	-20 to 40°C


CONSTRUCTION

Housing	Metal
Cover	Polycarbonate
Finish	White
IP Rating	IP20
Net Weight	21.2 lbs
Gross Weight	25.4 lbs
Carton Qty	2
Carton Dimensions	49.5 x 5.5 x 25.7 in

ACCESSORIES (Ordered Separately)

Emergency LED Driver	BLD-YT08D
----------------------	-----------

DIMENSIONS

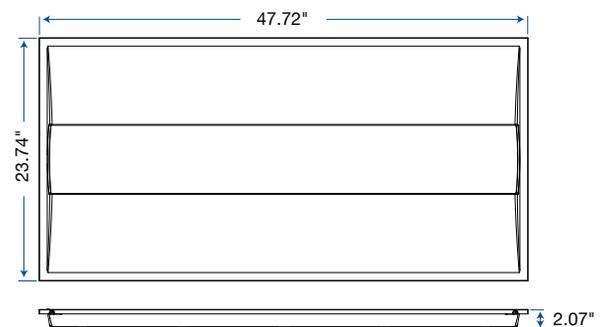

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833