

Projet: Type:

**Vapor Tight 56W 100-277V 5000K**

**CARACTERISTICS**

- IP65 waterproof luminaire
- Designed for quick and easy installation
- Dimmable by 0-10V Dimmer down to 10%
- DLC standard and eligible to subsidies



**NOMENCLATURE**

SERIE	DIMENSIONS	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
VT	04	C	W	D	5	056	0	D	JY
Vapor tight	4ft	clear	white	100-277V	5000K	56W	N/A	dim 0-10V	JY

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	7,032
CCT	5000K
ANGLE	110°
C.R.I.	86
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	SMD2835
LED QTY	224
LED VOLTAGE	40V
LED MAX CURRENT	1200mA
FLICKER	Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Polycarbonate
HOUSING FINISH	White
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.50 KG
OPERATING TEMP.	-20°C ~ 45°C
APPLICATION	Indoor

**ELECTRICAL SPECIFICATIONS**


REAL POWER	53.4 W
VOLTAGE	100-277V
EFFICIENCY	132.68 lm/w
POWER FACTOR	96 %
T.H.D	5.1 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-ILDCEF
FCC	No
BARCODE	882110004372
ENVIRONMENTAL	NEMA4X
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	2KV
SURGE PROTECTION WITHOUT GROUNDING	1.6KV

<b>INSTALLATION</b>	Surface Mount
<b>CABLE LENGTH</b>	N/A

## DIMENSIONS

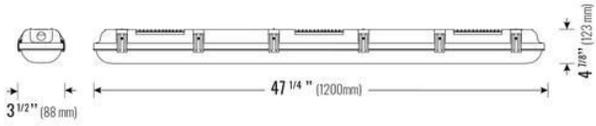

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
121.00 cm X 13.00 cm X 10.00 cm	N/A	N/A	3.00 kg	18 
47 5/8 " X 5 1/8 " X 3 7/8 "			6.61 lbs	

## PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7