

Projet: \_\_\_\_\_ Type: \_\_\_\_\_ Qté: \_\_\_\_\_

**Work Light 150W 120V 5000K**

The SpecLite Work Light is the ideal work light for any construction site or work area. Its protective cage makes it a robust and shock-resistant luminaire (IK10). With 320° light emission, it provides powerful and well-distributed illumination. It is also equipped with 6kV surge protection. Compatible with 120V only, the Work Light ensures you can work efficiently when permanent lighting has not yet been installed. It features an integrated electrical outlet for easy daisy chaining and powering work tools on-site. Please note that the outlet supports a maximum load of 600W. The Work Light ensures a safe and well-lit work environment, enhancing task efficiency on construction sites.



**CARACTERISTICS**

- IK10 certified, it provides exceptional impact protection (up to 20 joules), ideal for job site environments.
- Temporary and portable installation: Easy to move and reposition according to job site needs.
- Robust construction: Designed to withstand the most extreme conditions, ensuring a long lifespan.
- Integrated power outlet: Allows for connecting low-power equipment, with a total maximum load of 600W.

**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WK	00	C	C	A	5	150	00	0	GK
Work light	omni	clear	orange	120V	5000K	150W	N/A		GK

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	18,000
CCT	5000K
ANGLE	320°
C.R.I.	80
DIMMABLE	N/A
PHOTOCELL	N/A
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	Lumileds SMD2835
LED QTY	234
LED VOLTAGE	72V
LED MAX CURRENT	480mA
FLICKER	Not Flicker-Free

**ELECTRICAL SPECIFICATIONS**

REAL POWER	150 W
VOLTAGE	120V
EFFICIENCY	120 lm/w
POWER FACTOR	90 %
T.H.D	8.9 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**


REGULATORY LISTING	cUL
EFFICIENCY LISTING	N/A
DLC ID	
FCC	
BARCODE	882110004518
ENVIRONMENTAL	IP64
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	4KV
SURGE PROTECTION WITHOUT GROUNDING	2.4KV

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Polycarbonate
HOUSING FINISH	Orange
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.70 KG
OPERATING TEMP.	-30°C ~ 60°C

<b>APPLICATION</b>	Indoor
<b>INSTALLATION</b>	Suspended
<b>CABLE LENGTH</b>	6'


## DIMENSIONS

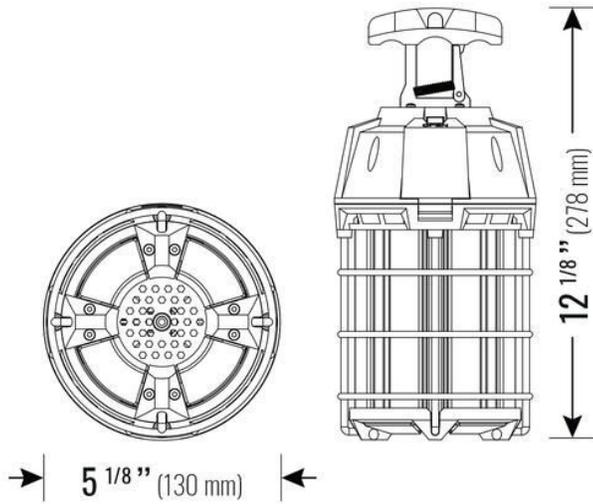

## PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
35.00 cm X 20.00 cm X 17.00 cm	41.50 cm X 36.30 cm X 36.10 cm	4	11.00 kg	96 
13 3/4 " X 7 7/8 " X 6 3/4 "	16 3/8 " X 14 1/4 " X 14 1/4 "		24.25 lbs	

## PRODUCTS IMAGES

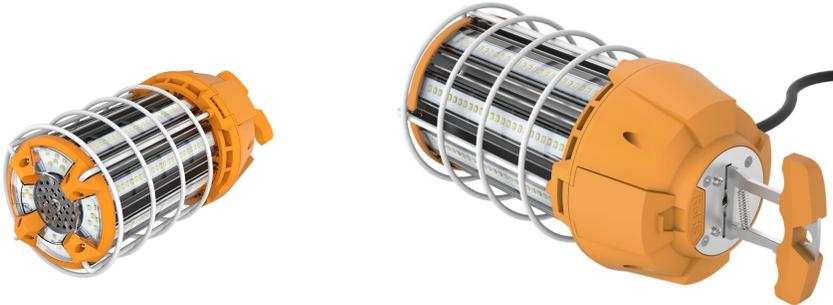

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7