

Projet:

Type:

Qté:

Wall Pack Mini 13W 100-277V 4000K

The Spec-lite Mini Wall Pack is a versatile outdoor lighting solution, ideal for securing areas near doors or on various types of buildings. This fixture is available in models ranging from 13W to 26W, offering different options in terms of power and color temperature (from 4000K to 5000K). Equipped with an integrated photocell, each model operates automatically from dusk to dawn, ensuring that outdoor areas remain secure throughout the night. Designed with a solid, weatherproof structure (IP65), it provides optimal protection in demanding outdoor environments. Choose the power and features that suit your needs while benefiting from reliable and durable performance.

CARACTERISTICS

- DLC Premium Certified: Ensures maximum eligibility for subsidies while providing durable and reliable performance.
- Integrated photocell: Automates lighting based on ambient light, allowing activation from dusk to dawn.
- Robust construction: Designed to withstand the toughest conditions, ensuring maximum durability.
- DLC Certified: Maximizes eligibility for energy subsidies for optimal return on investment.



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WL	00	C	B	D	4	013	0	P	ML
Wall pack mini	120°	clear	black	100-277V	4000K	13W	N/A	int. photo.	ML

PHOTOMETRIC SPECIFICATIONS

LUMENS	1,765
CCT	4000K
ANGLE	110°
C.R.I.	72
DIMMABLE	N/A
PHOTOCELL	Integrated Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	SMD2835
LED QTY	16
LED VOLTAGE	72V DC
LED MAX CURRENT	170mA
FLICKER	Not Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	0.40 KG
OPERATING TEMP.	-40°C ~ 50°C

ELECTRICAL SPECIFICATIONS


REAL POWER	12.8 W
VOLTAGE	100-277V
EFFICIENCY	137.89 lm/w
POWER FACTOR	89.5 %
T.H.D	19.9 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	DLC Premium
DLC ID	PD6KF2TD
FCC	No
BARCODE	882110005348
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	4KV
SURGE PROTECTION WITHOUT GROUNDING	2.4KV

APPLICATION	Outdoor
INSTALLATION	Wall Mount
CABLE LENGTH	N/A

DIMENSIONS

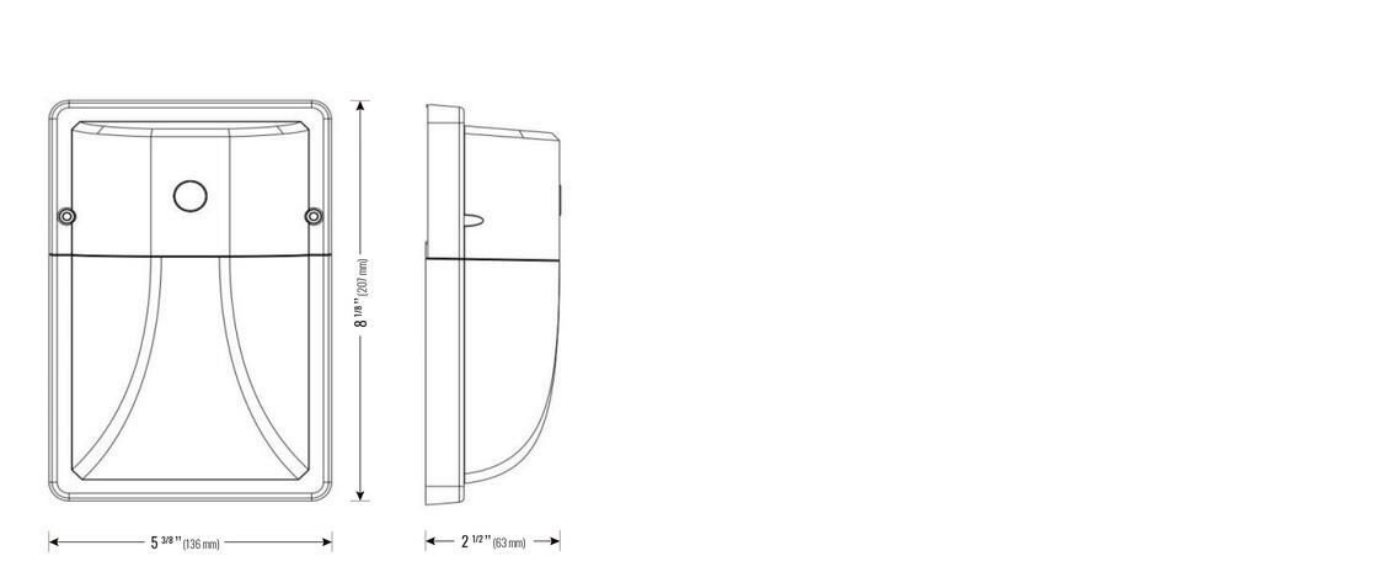

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
21.00 cm X 15.00 cm X 7.00 cm	75.00 cm X 30.50 cm X 23.00 cm	20	10.00 kg	320 
8 1/4 " X 5 7/8 " X 2 3/4 "	29 1/2 " X 12 " X 9 "		22.05 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7