

Projet:	Type:	Qté:
---------	-------	------


Wall Pack Mini 26W 100-277V 5000K

The SpecLite Mini Wall Pack is a versatile outdoor lighting solution, ideal for securing areas near doors or on various types of buildings. This fixture is available in models ranging from 13W to 26W, offering different options in terms of power and color temperature (from 4000K to 5000K). Equipped with an integrated photocell, each model operates automatically from dusk to dawn, ensuring that outdoor areas remain secure throughout the night. Designed with a solid, weatherproof structure (IP65), it provides optimal protection in demanding outdoor environments. Choose the power and features that suit your needs while benefiting from reliable and durable performance.



CARACTERISTICS

- DLC Premium Certified: Ensures maximum eligibility for subsidies while providing durable and reliable performance.
- Integrated photocell: Automates lighting based on ambient light, allowing activation from dusk to dawn.
- Robust construction: Designed to withstand the toughest conditions, ensuring maximum durability.
- DLC Certified: Maximizes eligibility for energy subsidies for optimal return on investment.



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WL	00	C	R	D	5	026	0	P	ML
Wall pack mini	120°	clear	brown	100-277V	5000K	26W	N/A	int. photo.	ML

PHOTOMETRIC SPECIFICATIONS

LUMENS	3,542
CCT	5000K
ANGLE	120°
C.R.I.	71
DIMMABLE	N/A
PHOTOCELL	Integrated Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	75,000 hrs
LED TYPE	SMD 2835
LED QTY	30
LED VOLTAGE	60VDC
LED MAX CURRENT	390mA
FLICKER	Not Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Bronze
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	0.80 KG
OPERATING TEMP.	-40°C ~ 50°C

ELECTRICAL SPECIFICATIONS


REAL POWER	25.6 W
VOLTAGE	100-277V
EFFICIENCY	138.36 lm/w
POWER FACTOR	88.9 %
T.H.D	17.6 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cETL
EFFICIENCY LISTING	DLC Premium
DLC ID	PUUSW7BW
FCC	No
BARCODE	882110000640
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	4KV
SURGE PROTECTION WITHOUT GROUNDING	2.4KV

APPLICATION	Outdoor
INSTALLATION	Wall Mount
CABLE LENGTH	N/A

DIMENSIONS

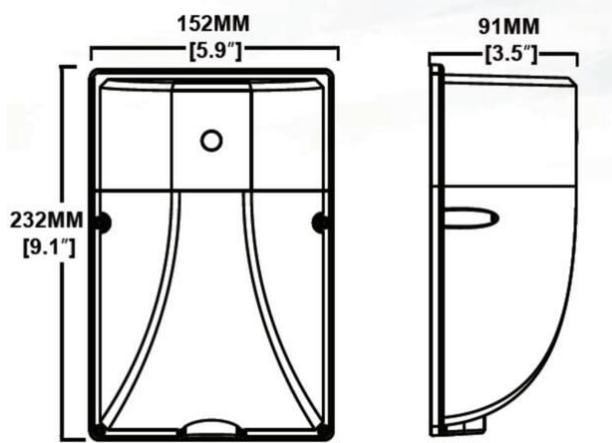

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
32.50 cm X 25.00 cm X 10.60 cm	59.00 cm X 34.50 cm X 26.50 cm	5	10.00 kg	150 
12 3/4 " X 9 7/8 " X 4 1/8 "	23 1/4 " X 13 5/8 " X 10 3/8 "		22.05 lbs	

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7