

| | | |
|---------|-------|------|
| Projet: | Type: | Qté: |
|---------|-------|------|

Wall Pack Mini 30-25-18W 120-347V 3000-4000-5000K

The SpecLite Mini Wall Pack is a versatile outdoor lighting solution, ideal for securing areas near doors or on various types of buildings. This fixture is available in models ranging from 13W to 26W, offering different options in terms of power and color temperature (from 4000K to 5000K). Equipped with an integrated photocell, each model operates automatically from dusk to dawn, ensuring that outdoor areas remain secure throughout the night. Designed with a solid, weatherproof structure (IP65), it provides optimal protection in demanding outdoor environments. Choose the power and features that suit your needs while benefiting from reliable and durable performance.



CARACTERISTICS

- DLC Premium Certified: Ensures maximum eligibility for subsidies while providing durable and reliable performance.
- Integrated photocell: Automates lighting based on ambient light, allowing activation from dusk to dawn.
- Robust construction: Designed to withstand the toughest conditions, ensuring maximum durability.
- DLC Certified: Maximizes eligibility for energy subsidies for optimal return on investment.

NOMENCLATURE

| SERIE | BEAM ANGLE | LENS | BODY COLOUR | VOLTAGE | CCT | MAX POWER | OPTIONS 1 | OPTIONS 2 | VER. |
|----------------|------------|-------|-------------|----------|-----------------|-----------|-----------|-------------|------|
| WL | 00 | C | R | F | C | 030 | 0 | P | SS |
| Wall pack mini | 120° | clear | bronze | 120-347V | 3000-4000-5000K | 30-25-18W | N/A | int. photo. | SS |

PHOTOMETRIC SPECIFICATIONS

| | |
|-----------------------|------------------------|
| LUMENS | 3,900 |
| CCT | 3CCT (3000-4000-5000K) |
| ANGLE | 120° |
| C.R.I. | 74 |
| DIMMABLE | 0-10V DC |
| PHOTOCELL | Integrated Photocell |
| SENSOR | N/A |
| LUMEN MAINTENANCE L70 | 50,000 hrs |
| LED TYPE | SMD 2835 |
| LED QTY | 60 |
| LED VOLTAGE | DC80-100V |
| LED MAX CURRENT | 315mA |
| FLICKER | Flicker-Free |

MECHANICAL SPECIFICATIONS

| | |
|------------------|--------------------------|
| HOUSING MATERIAL | Aluminium, Powder Coated |
| HOUSING FINISH | Bronze |
| LENS MATERIAL | Polycarbonate |
| LENS FINISH | Clear |
| WEIGHT | 0.65 KG |
| OPERATING TEMP. | -40°C ~ 45°C |

ELECTRICAL SPECIFICATIONS


| | |
|--------------|----------|
| REAL POWER | 30 W |
| VOLTAGE | 120-347V |
| EFFICIENCY | 130 lm/w |
| POWER FACTOR | 91.3 % |
| T.H.D | 17.7 % |
| FREQUENCY | 50/60Hz |

CERTIFICATIONS

| | |
|------------------------------------|--------------|
| REGULATORY LISTING | cUL |
| EFFICIENCY LISTING | DLC Premium |
| DLC ID | S-54YG84 |
| FCC | No |
| BARCODE | 882110008431 |
| ENVIRONMENTAL | IP65 |
| IK PROTECTION | N/A |
| SURGE PROTECTION WITH GROUNDING | 2KV |
| SURGE PROTECTION WITHOUT GROUNDING | 2KV |

| | |
|---------------------|------------------|
| APPLICATION | Indoor / Outdoor |
| INSTALLATION | Wall Mount |
| CABLE LENGTH | 5' |

DIMENSIONS

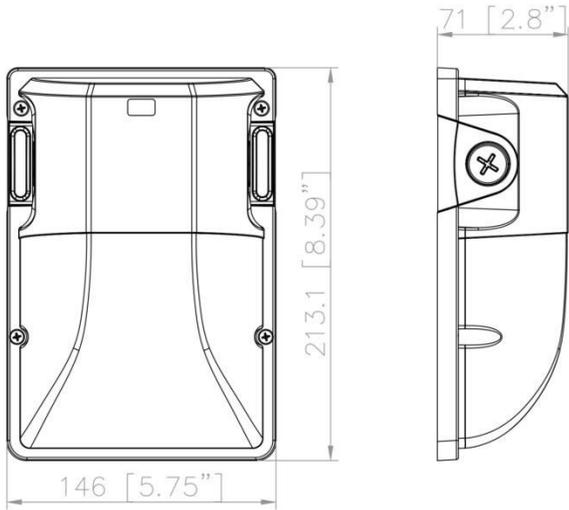

PACKAGING

| DIMENSION INNER CARTON | DIMENSION OUTER CARTON | QUANTITY MASTER | MASTER WEIGHT | PALLET QUANTITY |
|-------------------------------|--------------------------------|-----------------|---------------|---|
| 15.20 cm X 22.30 cm X 8.00 cm | 43.00 cm X 32.80 cm X 47.00 cm | 20 | 16.85 kg | 480  |
| 6" X 8 3/4" X 3 1/8" | 16 7/8" X 12 7/8" X 18 1/2" | | 37.15 lbs | |

PRODUCTS IMAGES



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7