

Projet:	Type:	Qté:
---------	-------	------

Wall Pack Premium 60-40-30W 120-347V 3000-4000-5000K

The SpecLite Premium Wall Pack is an economical and high-performing solution for replacing traditional Wall Packs up to 400W MH or HPS. Its aluminum structure and anti-yellowing borosilicate glass lens provide resistance to impacts and harsh weather conditions. This Wall Pack is also equipped with two dip switches, allowing you to select the power and color temperature (CCT: 3000K, 4000K, and 5000K) directly during installation. The Premium Wall Pack ensures optimal lighting performance and exceptional durability, making it ideal for demanding outdoor environments.



CARACTERISTICS

- 120° wide-angle lens: Provides optimal light diffusion for lighting at the base of walls.
- Integrated photocell: Automates lighting based on ambient light, ensuring activation from dusk to dawn.
- Universal application: Offers 3 color temperatures (3CCT) and 3 selectable wattages, while being compatible with voltages ranging from 120VAC to 347VAC.
- DLC Premium Certified: Optimizes eligibility for energy subsidies to maximize savings.



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WP	00	C	R	F	C	060	0	P	SS
Wall pack	120°	clear	bronze	120-347V	3000-4000-5000K	60-40-30W	N/A	int. photo.	SS

PHOTOMETRIC SPECIFICATIONS

LUMENS	7,916
CCT	3000/4000/5000K
ANGLE	120°
C.R.I.	73
DIMMABLE	0-10V DC
PHOTOCELL	Integrated Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD2835
LED QTY	168
LED VOLTAGE	180-260Vdc
LED MAX CURRENT	400mA
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Bronze
LENS MATERIAL	Glass
LENS FINISH	Clear
WEIGHT	0.00 KG
OPERATING TEMP.	-40°C ~ 45°C

ELECTRICAL SPECIFICATIONS


REAL POWER	58.8 W
VOLTAGE	120-347V
EFFICIENCY	134.63 lm/w
POWER FACTOR	96 %
T.H.D	10.9 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-462QJX
FCC	No
BARCODE	882110007434
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	4KV

APPLICATION	Outdoor
INSTALLATION	Wall Mount
CABLE LENGTH	N/A


DIMENSIONS

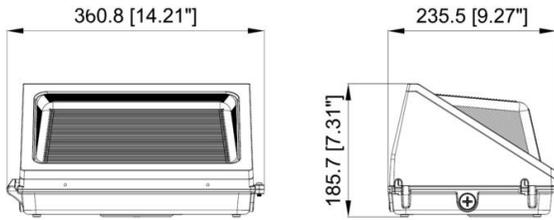

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
39.00 cm X 30.00 cm X 24.00 cm 15 3/8 " X 11 3/4 " X 9 1/2 "	N/A	N/A	4.50 kg 9.92 lbs	40 

PRODUCTS IMAGES

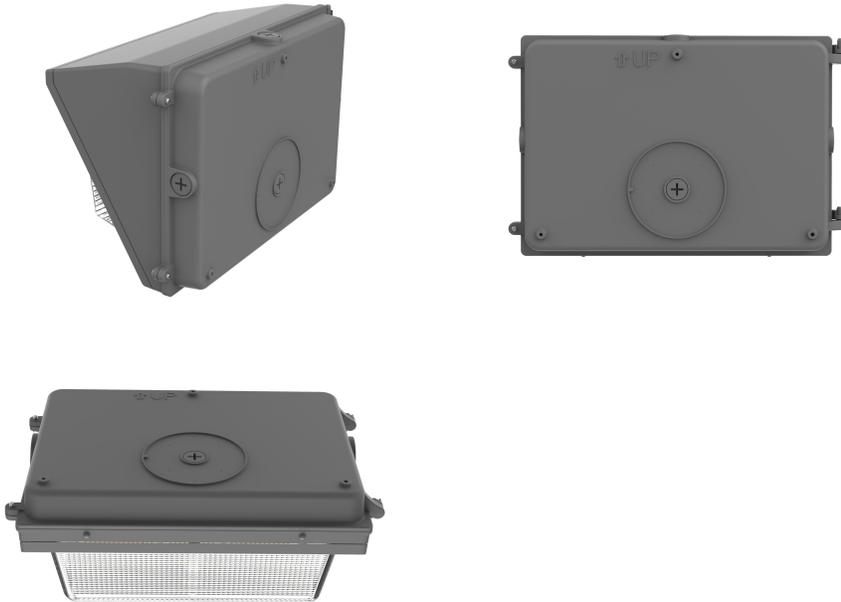

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7