

Projet:	Type:	Qté:
---------	-------	------

**Wall Pack Premium 120-100-80W 120-347V 3000-4000-5000K**

The SpecLite Premium Wall Pack is an economical and high-performing solution for replacing traditional Wall Packs up to 400W MH or HPS. Its aluminum structure and anti-yellowing borosilicate glass lens provide resistance to impacts and harsh weather conditions. This Wall Pack is also equipped with two dip switches, allowing you to select the power and color temperature (CCT: 3000K, 4000K, and 5000K) directly during installation. The Premium Wall Pack ensures optimal lighting performance and exceptional durability, making it ideal for demanding outdoor environments.



**CARACTERISTICS**

- 120° wide-angle lens: Provides optimal light diffusion for lighting at the base of walls.
- Integrated photocell: Automates lighting based on ambient light, ensuring activation from dusk to dawn.
- Universal application: Offers 3 color temperatures (3CCT) and 3 selectable wattages, while being compatible with voltages ranging from 120VAC to 347VAC.
- DLC Premium Certified: Optimizes eligibility for energy subsidies to maximize savings.



**NOMENCLATURE**

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
WP	00	C	R	F	C	120	0	P	SS
Wall pack	120°	clear	bronze	120-347V	3000-4000-5000K	120-100-80W	N/A	int. photo.	SS

**PHOTOMETRIC SPECIFICATIONS**

LUMENS	17,066
CCT	3CCT (3000-4000-5000K)
ANGLE	120°
C.R.I.	82
DIMMABLE	0-10V DC
PHOTOCELL	Integrated Photocell
SENSOR	N/A
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD2835
LED QTY	468
LED VOLTAGE	180-260V
LED MAX CURRENT	440mA
FLICKER	Not Flicker-Free

**MECHANICAL SPECIFICATIONS**

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Bronze
LENS MATERIAL	Glass
LENS FINISH	Clear
WEIGHT	4.80 KG
OPERATING TEMP.	-40°C ~ 45°C

**ELECTRICAL SPECIFICATIONS**


REAL POWER	122.5 W
VOLTAGE	120-347V
EFFICIENCY	139.31 lm/w
POWER FACTOR	94 %
T.H.D	13.9 %
FREQUENCY	50/60Hz

**CERTIFICATIONS**

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-JVFP0H
FCC	No
BARCODE	882110007083
ENVIRONMENTAL	IP65
IK PROTECTION	IK06
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	4KV

<b>APPLICATION</b>	Outdoor
<b>INSTALLATION</b>	Wall Mount
<b>CABLE LENGTH</b>	N/A

**DIMENSIONS**

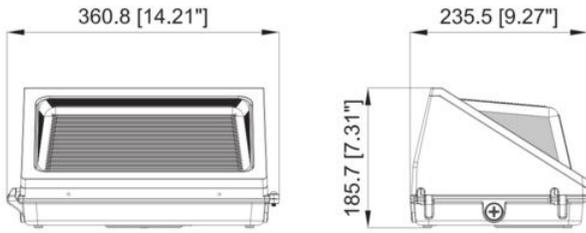

**PACKAGING**

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
39.00 cm X 29.00 cm X 24.00 cm 15 3/8 " X 11 3/8 " X 9 1/2 "	N/A	N/A	5.00 kg 11.02 lbs	40 

**PRODUCTS IMAGES**



SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818  
**HEADQUARTER:** 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6  
**WAREHOUSE:** 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7