

WPX Wall Pack

30W | Colour Selectable | 120-347V



The most versatile architectural wall pack in Canada
Ideal for outdoor wall-mount applications such as commercial,
industrial, retail, or hospitality buildings

Type III Distribution
Optics Standard

Type II and Type IV
options available

Durable Die-Cast
Aluminum Housing



Also available
in Black



1/2" NPT Entry
on all sides



Certified by DarkSky.org

Approved by DarkSky
when set for 3000K operation

Colour Selectable
3000K/4000K/5000K

120-347V Driver
with 6kV
surge protection



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	3,764 lm
Efficacy	122 lm/W
CCT	3000K / 4000K / 5000K
CRI	73
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	30W 5000K


APPROVALS AND LISTINGS

cETL	5018387
DLC Premium	PLYPS6YKR048

ACCESSORIES (Ordered Separately)

Visor	WPX-VISOR-S-WH
Type II Optics	WPX-T2S
Type IV Optics	WPX-T4S
Photocell (0-10V)	HD06VCRH <i>(Photocell and Receptacle)</i>
Motion Sensor (0-10V)	HB01DMS-C <i>(Multifunction Motion and Daylight)</i>

ILLUMINANCE AT A DISTANCE

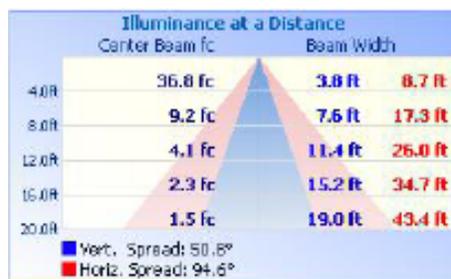

ELECTRICAL

Wattage	30W
Voltage	120-347V
Power Factor	0.9
Amperage	0.45A
THD	14%
Operating Temp	-40 to 45°C
Operataing Temp (with Sensor)	-20 to 45°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Powder Coat
Finish Colour	White
IP Rating	IP65

DIMENSIONS & WEIGHTS

Fixture Weight	3.65 lbs
Fixture Dimensions	9.8 x 8.7 x 6.7 in
Carton Qty	1
Carton Weight	5.15 lbs
Carton Dimensions	10.4 x 10.2 x 8 in

DIMENSIONS

