
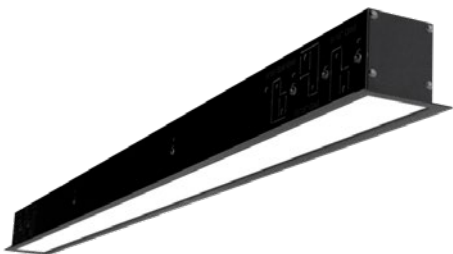
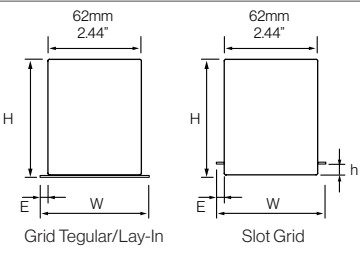



Project:			
Ordering info:			
Submitted by:		Date:	



Linear Recessed Luminaire ZNTH60-RD	Wattage Range 25-80W	Lumen Range 3,250-10,400lm	Efficacy 130lm/W	Light Performance 813-1,300lm/ft																										
	3CCT Selectable 3000K 3500K 4000K Finishes Black White	 <table border="1" data-bbox="1060 594 1513 762"> <thead> <tr> <th></th> <th>W</th> <th>E</th> <th>H</th> <th>h</th> </tr> </thead> <tbody> <tr> <td>14.29mm 9/16" Grid</td> <td>73.41mm 2.89"</td> <td>5.84mm 0.23"</td> <td>71.88mm 2.83"</td> <td>-</td> </tr> <tr> <td>23.81mm 15/16" Grid</td> <td>83.06mm 3.27"</td> <td>10.41mm 0.41"</td> <td>71.88mm 2.83"</td> <td>-</td> </tr> <tr> <td>14.29mm 9/16" Slot Grid</td> <td>73.41mm 2.89"</td> <td>5.84mm 0.23"</td> <td>81.03mm 3.19"</td> <td>8.89mm 0.35"</td> </tr> </tbody> </table>  <table border="1" data-bbox="1060 877 1474 961"> <thead> <tr> <th></th> <th>4FT</th> <th>8FT</th> </tr> </thead> <tbody> <tr> <td>L</td> <td>1217.4mm 47.93"</td> <td>2436.6mm 95.93"</td> </tr> </tbody> </table>				W	E	H	h	14.29mm 9/16" Grid	73.41mm 2.89"	5.84mm 0.23"	71.88mm 2.83"	-	23.81mm 15/16" Grid	83.06mm 3.27"	10.41mm 0.41"	71.88mm 2.83"	-	14.29mm 9/16" Slot Grid	73.41mm 2.89"	5.84mm 0.23"	81.03mm 3.19"	8.89mm 0.35"		4FT	8FT	L	1217.4mm 47.93"	2436.6mm 95.93"
	W	E	H	h																										
14.29mm 9/16" Grid	73.41mm 2.89"	5.84mm 0.23"	71.88mm 2.83"	-																										
23.81mm 15/16" Grid	83.06mm 3.27"	10.41mm 0.41"	71.88mm 2.83"	-																										
14.29mm 9/16" Slot Grid	73.41mm 2.89"	5.84mm 0.23"	81.03mm 3.19"	8.89mm 0.35"																										
	4FT	8FT																												
L	1217.4mm 47.93"	2436.6mm 95.93"																												
																														

Ordering Guide Example: ZNTH60-RD/4/F/05L/MK3/80/UN3/D1/B

Family/ Series	Mounting		Function		Length		Diffuser		Direct	Max Total Lumens		CCT 30/35/40K	CRI	Voltage		Driver		Housing Finish*	
ZNTH60	R	Recessed	D	Direct	■ 4	4ft	F	Frosted	■ 05L	5000 (4ft)	MK3	80	UN3	120-347V	D1	0-10V Dim 1%	■ W	White	
			DJ	Joiner	■ 8	8ft			■ 10L	10000 (8ft)							■ B	Black	
			DS	Start/End															

* White is standard

Light Outputs Function: Direct

Catalogue Code	Voltage	Dimension L	CCT	Efficacy lm/W	CRI	Direct		
						Watts	Delivered Lumens	Lumens per foot
ZNTH60-RD/4	120-347V	47.93"	30K-35K-40K	130	80+	40	5200	1300
						33	4290	1073
						25	3250	813
ZNTH60-RD/8	120-347V	95.93"	30K-35K-40K	130	80+	80	10400	1300
						66	8580	1073
						50	6500	813

Project:			
Ordering info:			
Submitted by:		Date:	



Specifications


Housing:	The Zenith60 Recessed housing is constructed of extruded aluminum 6063T5 and Cold rolled steel.	Power Feed:	Internal wiring harness with quick connection via top of housing quick access plate.
End Caps:	Formed flexible sheet metal, post painted end caps complete with knockout for end wiring if necessary. Multiple options come standard to support 5 installation methods in one kit.	Suspension:	Fully adjustable side mount rails support 5 different mounting methods. Standard 23.81mm (15/16") T Bar, 14.29mm (9/16") T Bar, 14.29mm (9/16") Slot T Bar, Flange Trim (Drywall), and Trim less mount.
Optics:	Frosted polycarbonate snap in lens with Lambertian distribution.	LED:	Name brand LED with long life offered in standard 80+ CRI. On board selectable CCT offers maximum flexibility (3000K/3500K/4000K).
Driver:	LED drivers for Direct outputs are contractor wattage selectable and universal 120-347V input (up to 3 different outputs-see output chart). Less than 20%THD and 0-10V dimmable down to 1%.	Finish:	Polyester powder painted finish

Model & Ordering Information


Ordering Code	DLC Premium	Model Number	Description	Case QTY
3695006	Yes	ZNTH60-RD/4/F/05L/MK3/80/UN3/D1/B	4Ft., Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	4
3695007	Yes	ZNTH60-RD/4/F/05L/MK3/80/UN3/D1/W	4Ft., Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	4
3696005	Yes	ZNTH60-RD/8/F/10L/MK3/80/UN3/D1/B	8Ft., Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	2
3696006	Yes	ZNTH60-RD/8/F/10L/MK3/80/UN3/D1/W	8Ft., Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	2
3696014	-	ZNTH60-RDS/4/F/05L/MK3/80/UN3/D1/B	4Ft., Start/End Luminaire, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	-
3696015	-	ZNTH60-RDS/4/F/05L/MK3/80/UN3/D1/W	4Ft., Start/End Luminaire, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	-
3696016	-	ZNTH60-RDJ/4/F/05L/MK3/80/UN3/D1/B	4Ft., Joiner Luminaire, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	-
3696017	-	ZNTH60-RDJ/4/F/05L/MK3/80/UN3/D1/W	4Ft., Joiner Luminaire, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	-
3696018	-	ZNTH60-RDS/8/F/10L/MK3/80/UN3/D1/B	8Ft., Start/End Luminaire, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	-
3696019	-	ZNTH60-RDS/8/F/10L/MK3/80/UN3/D1/W	8Ft., Start/End Luminaire, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	-
3696020	-	ZNTH60-RDJ/8/F/10L/MK3/80/UN3/D1/B	8Ft., Joiner Luminaire, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	-
3696021	-	ZNTH60-RDJ/8/F/10L/MK3/80/UN3/D1/W	8Ft., Joiner Luminaire, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	-
3690003	-	ZNTH60-K3	Joiner Kit for Row Mounting for (ZNTH60-RD)	-

Mounting


14.29mm (9/16") Grid

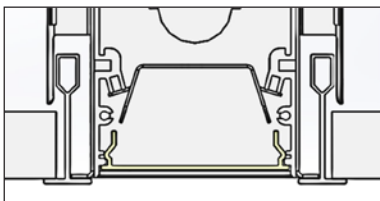


23.81mm (15/16") Grid

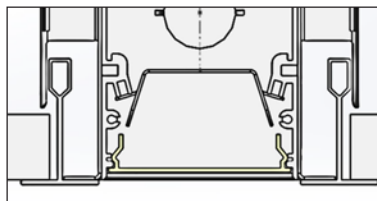


14.29mm (9/16") Slot Grid

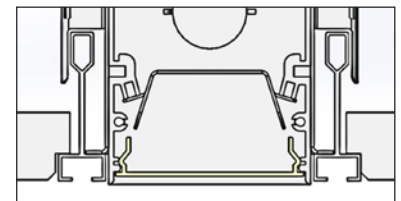

Drywall Flange

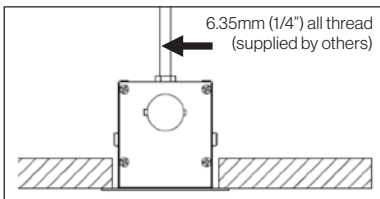

Drywall/Hard Ceiling Trimless

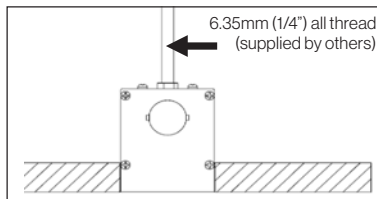

Project:			
Ordering info:			
Submitted by:		Date:	



Run Information

Option A						
Run length						
12ft	8ft Start/End	4ft Start/End	-	-	-	-
16ft	8ft Start/End	8ft Start/End	-	-	-	-
20ft	8ft Start/End	8ft Joiner	4ft Start/End	-	-	-
24ft	8ft Start/End	8ft Joiner	8ft Start/End	-	-	-
28ft	8ft Start/End	8ft Joiner	8ft Joiner	4ft Start/End	-	-
32ft	8ft Start/End	8ft Joiner	8ft Joiner	8ft Start/End	-	-
36ft	8ft Start/End	8ft Joiner	8ft Joiner	8ft Joiner	4ft Start/End	-
40ft	8ft Start/End	8ft Joiner	8ft Joiner	8ft Joiner	8ft Start/End	-
44ft	8ft Start/End	8ft Joiner	8ft Joiner	8ft Joiner	8ft Joiner	4ft Start/End
48ft	8ft Start/End	8ft Joiner	8ft Joiner	8ft Joiner	8ft Joiner	8ft Start/End

Note: Starter can be used as an Ender (Switch end caps)