

## 1" SLIM LIGHTS SLIM-RG1-5CCT



### HIGHLIGHTS

#### 1" Regress Module Changeable Trim With Selectable CCT

- Interchangeable Trims
- Type IC, Air-Tight - No Housing Required
- Fast Installation & No Junction Box Needed
- Includes two spring loaded clips to attached to any ceiling material
- 100%-10% dimming capability. Compatible with industry standard forward-phase / reverse-phase and Triac/ELV Dimmers
- Includes free white trim in standard packagin



### CERTIFICATIONS



### COLOUR TEMPERATURE

2700K / 3000K / 3500K / 4000K / 5000K (Selectable)




### SPECIFICATIONS

MODEL	SLIM-RG1-5CCT
Wattage	7W
Voltage	120V AC, 60Hz
Lumens	500 lmn
Beam Angle	38°
Lifetime	50,000 hours
Dimmable	Yes (TRIAC dimming)
CRI	90Ra+
Rating	IC rated/Indoor use/ Damp Location
Grade of Protection	IP54
Cutout	Ø2-1/8" (54mm)
Operating Temperature	-20°C ~ +40°C

# ELEVATE YOUR LIGHTING GAME

**5 YEAR WARRANTY**

### DIMENSIONS

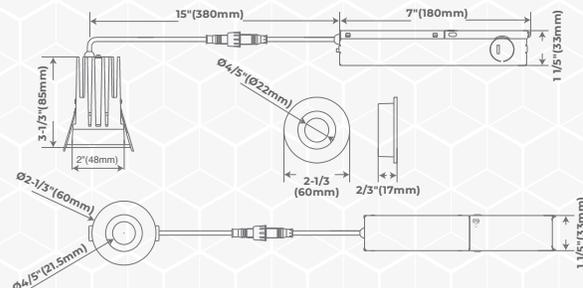


ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.

## 1" SLIM LIGHTS SLIM-RG1-5CCT



### CUT HOLE SIZE

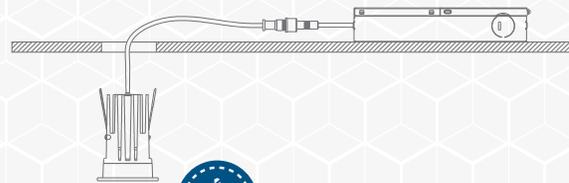

**Cut Hole Size**  
Ø2-1/8" (54mm)

### INCLUDED IN BOX

- 1" Regress Module Downlight with Remote Driver



### PRODUCT BREAKDOWN



### TRIM OPTIONS



### ACCESSORIES (SOLD SEPARATELY)



REFERENCE	QUANTITY	REMARKS	PROJECT DETAILS
			<b>Project:</b>
			<b>Location:</b>
			<b>Architect:</b>
			<b>Engineer:</b>
			<b>Contractor:</b>
			<b>Submitted By:</b>
			<b>Date:</b>

ORTECH reserves the right to modify at any time, without notice, any or all of our product's features, designs, components and specifications to meet market changes.