


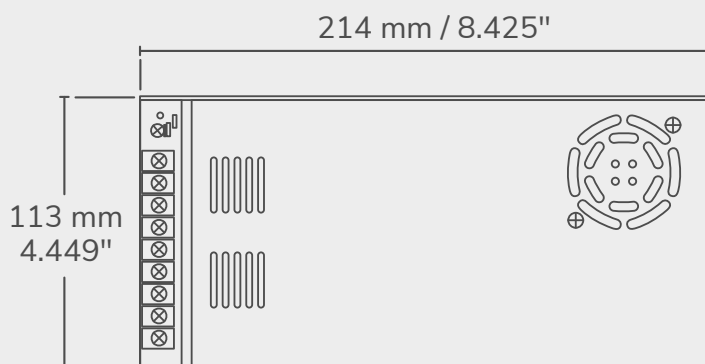

### FEATURES

- Available in 24V
- Protections: short circuit / Overload / Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, ETL RoHS Certification
- 3 Years warranty
- Output constant voltage
- AC input: 100~240VAC
- High efficiency > 83%
- Dimensions : 214 x 113 x 48mm (L x W x H)
- Weight : 0.650Kg/pcs

## TECHNICAL SPECIFICATIONS

| Model       |                    | LCPSLCO-24V-350W-IP20                                                |
|-------------|--------------------|----------------------------------------------------------------------|
| Output      | DC Voltage         | 24V                                                                  |
|             | Voltage Tolerance  | ±0.5V                                                                |
|             | Rated current      | 1.83A                                                                |
|             | Rated power        | 350W                                                                 |
| Input       | Voltage Range      | 100 ~ 265VAC                                                         |
|             | Frequency Range    | 40 ~ 60HZ                                                            |
|             | Efficiency (Typ.)  | >83%                                                                 |
|             | AC Current (Typ.)  | 1.83±0.002A                                                          |
| Protection  | Short Circuit      | Hiccup mode, recovers automatically after fault condition is removed |
|             | Overload           | overload protected@145-160% above peak rating                        |
|             | Over temperature   | Protection type: Shut down o/p voltage,re-power on to removed        |
| Environment | Working TEMP.      | -25 ~ +55°C                                                          |
|             | Ingress Protection | IP20                                                                 |
| Safety& EMC | Safety standards   | GB195110.1-2004/IEC61347-1:2003. UL, CE(EMC+LVD) approval            |
|             | EMC Test Standards | EN55015,EN61000,EN61547                                              |
| Others      | Net. Weight        | 0.650Kg                                                              |
|             | Size               | 214 x 113 x 48mm (L x W x H)                                         |



## JUNCTION BOX

- Metal junction box for 96W, 200W and 350W Hardwired Transformers
- Dimensions : 14.9" X 5.3" X 3.2"
- Product no. : LCJUNCBOX-14X5X3