

Installation Instruction

Linear Recessed Luminaire

ELECTRICAL SHOCK HAZARD

WARNING

Disconnect the Electrical supply at the service panel (fuse or circuit breaker) before installation. Failure to do so could result in serious injury.

Only qualified electricians should install this luminaire and must follow the applicable local Electrical Code Part 1 or the NEC, and any local codes and ordinances. Ensure that all necessary proper tools and materials to complete the installation are available before attempting to install this luminaire.

Read all instructions prior to installing this product.



This product has multiple installation methods for various mounting options. Follow directions closely. This unit is setup for 9/16" mounting hole and Flange style.

IMPORTANT CALCULATION FOR CONTINUOUS RATING



Linear Recessed Fixtures

MOUNTING TYPES & DIMENSION



9/16" Grid Tegular/Lay-In

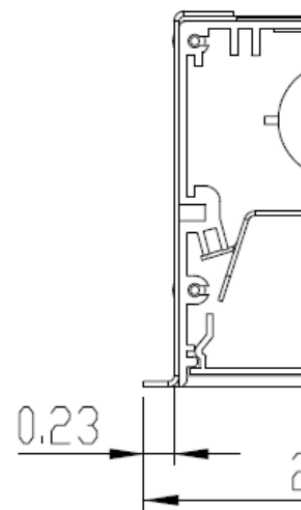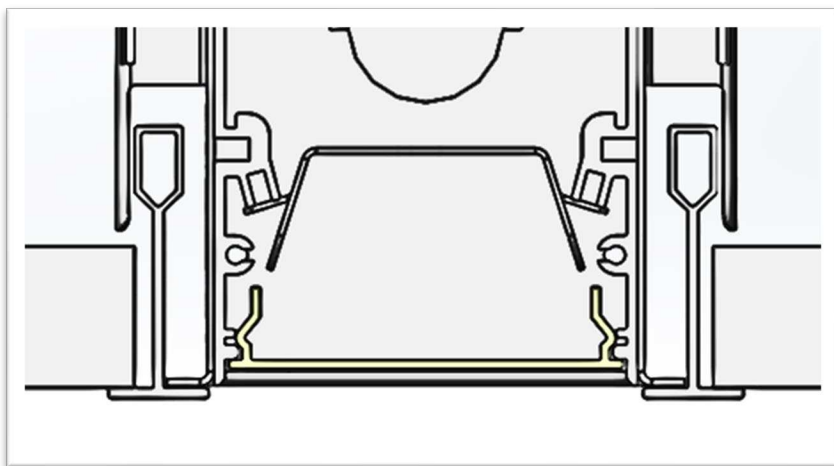

15/16" Grid Tegular/Lay-In

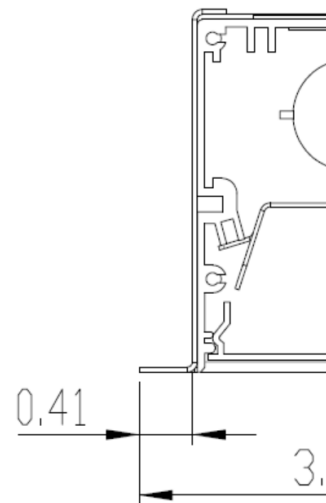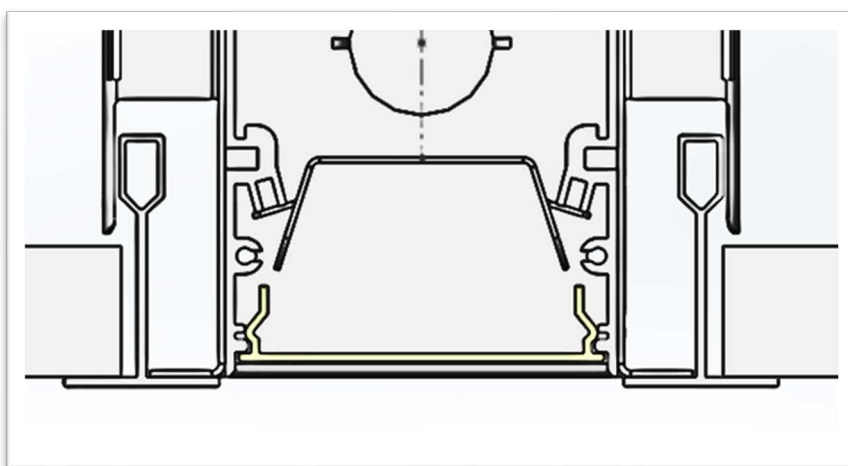


9/16" Slot Grid


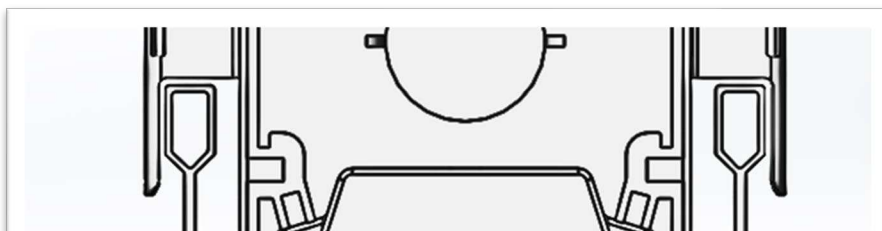


Linear Recessed Fixtures - Grid Mounting options


The side mounting bracket rails can be adjusted for the various grid for correct mounting position according to Ceiling Type. Dashed line Find match mark to bend hanger bracket out by hand . End caps will versions. Default set up is 9/16" Grid.

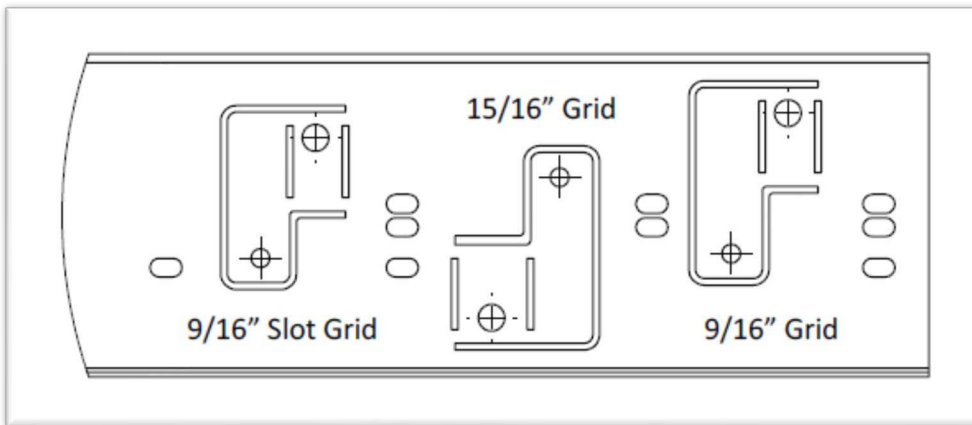

9/16" Grid

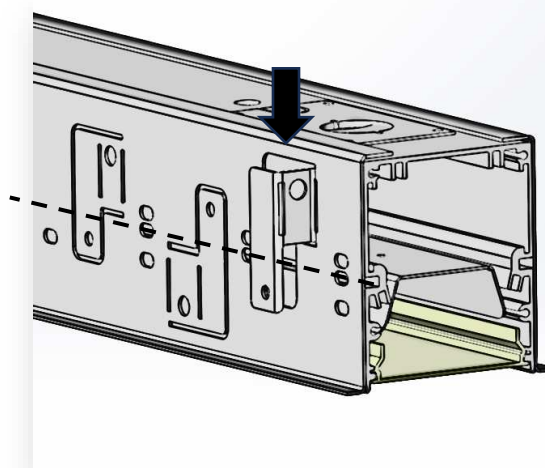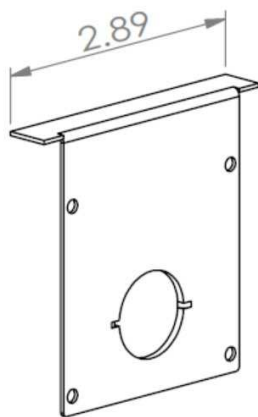



9/16" Slot Grid

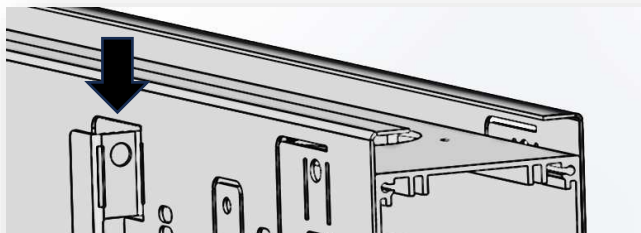

Linear Recessed Fixtures - Drywall Flange mount



The side mounting bracket rails can be adjusted for 2 different flange changed for other versions. Default set up is 9/16" Grid (smallest flange)

15/16" Grid

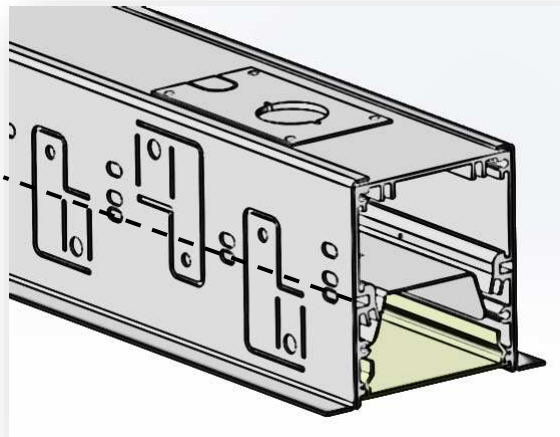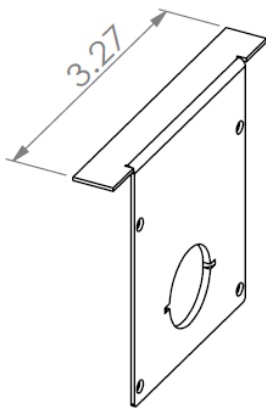


Removal of tabs on the plates

install

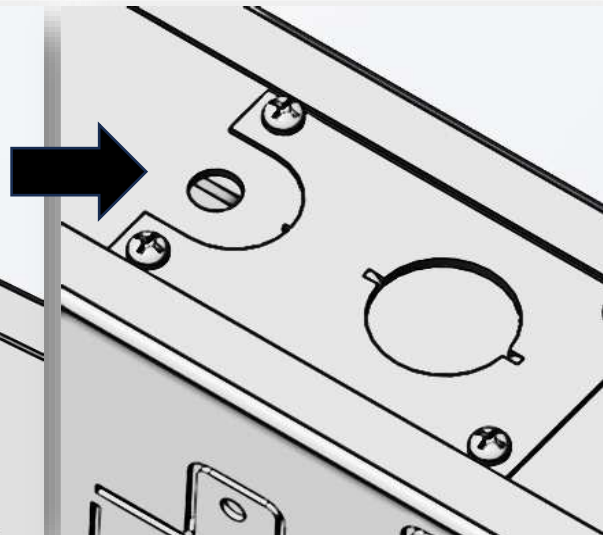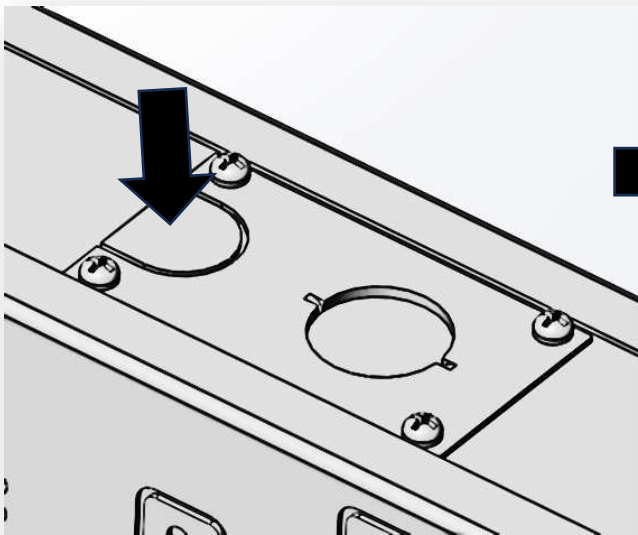


Linear Recessed Fixtures - Drywall/Hard Ceiling Trimless

Remove the side mounting bracket rails. Change end cap for flat version and secure to structure above install housing through mounting holes per instructions.

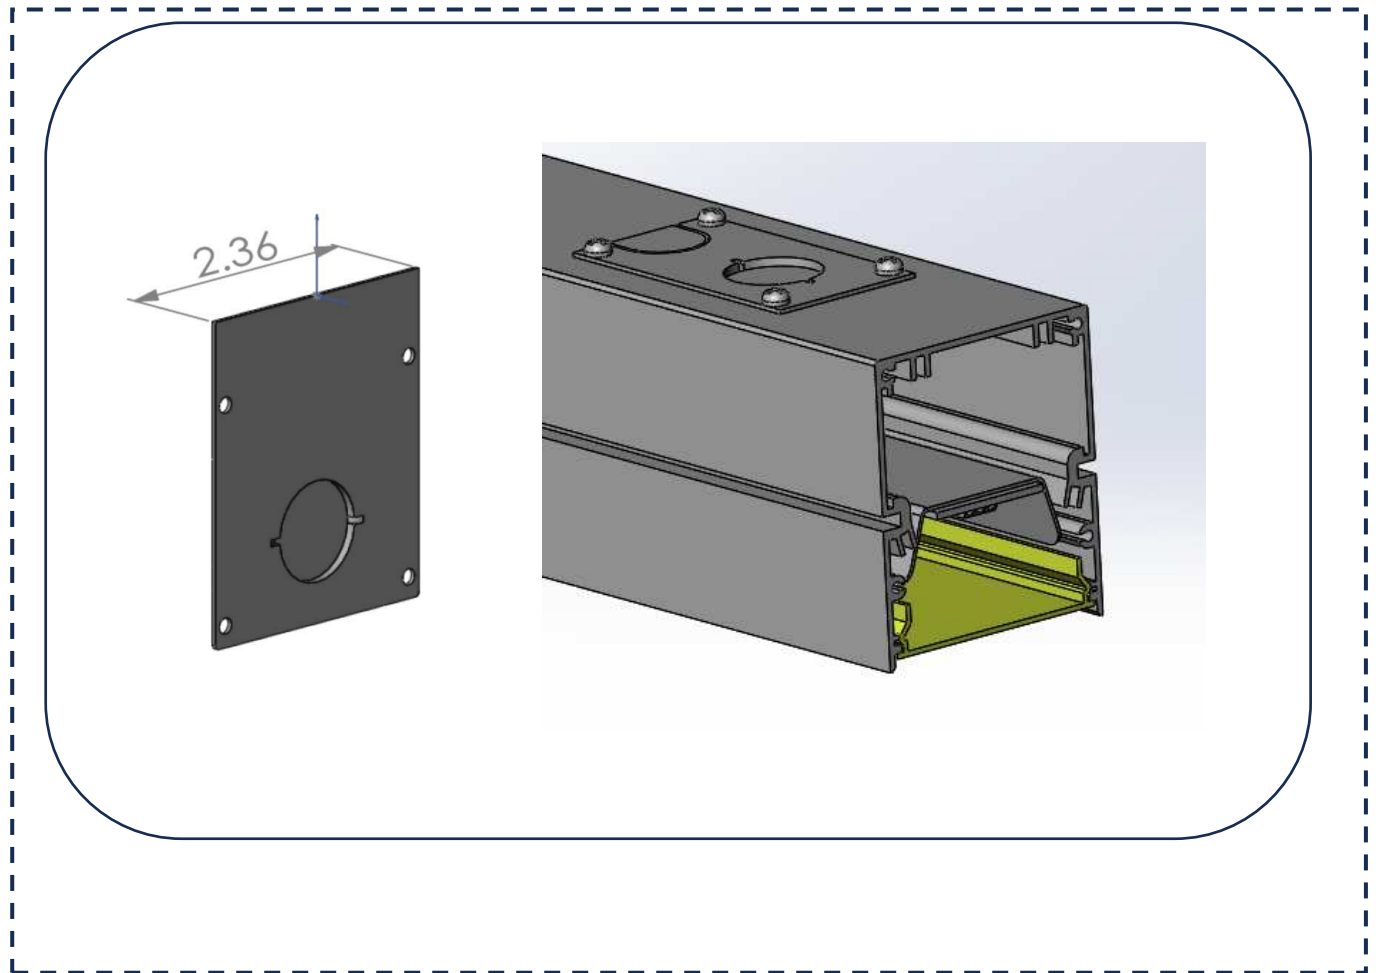


Removal of tabs on the plates

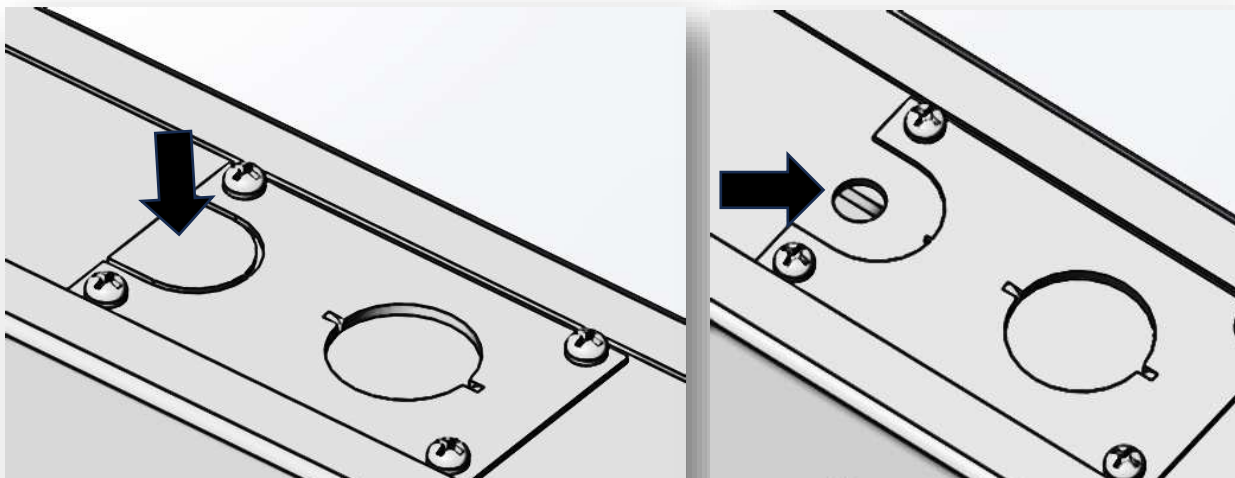


Linear Recessed Fixtures

CONTINUOUS INSTALLATION FOR DIRECT



Loose screws and
remove End cap

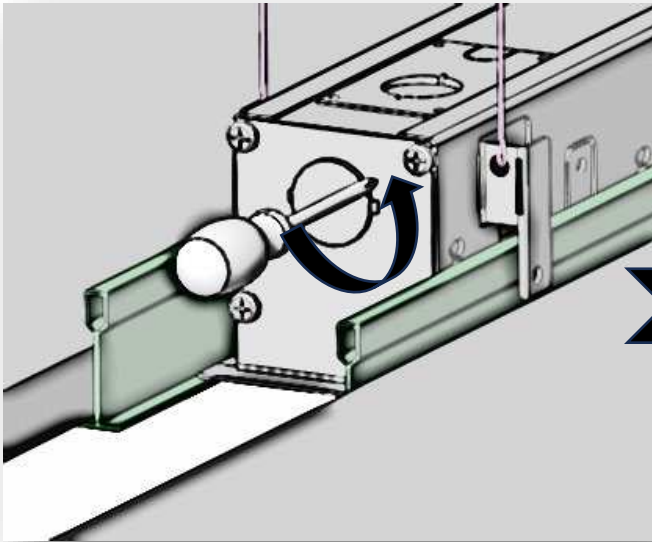


Remove diffuser

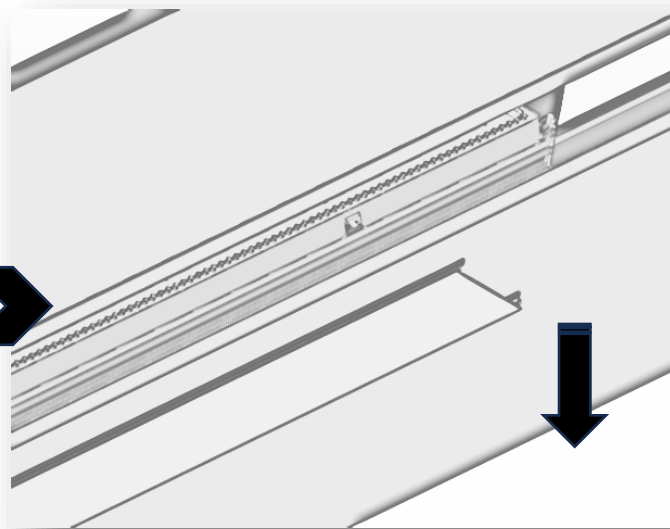

Insert Joint lock holder
to brackets

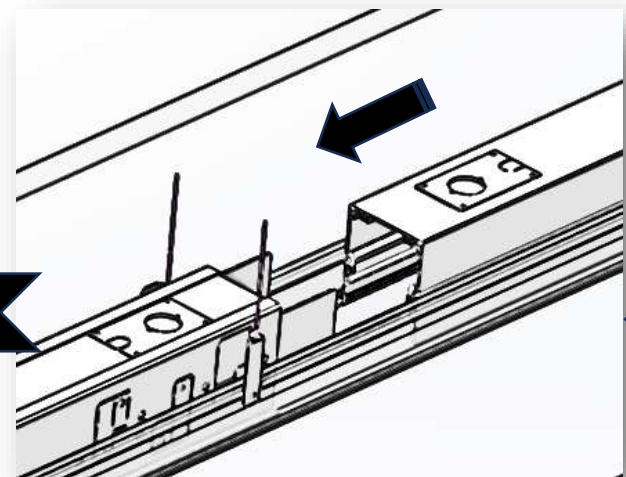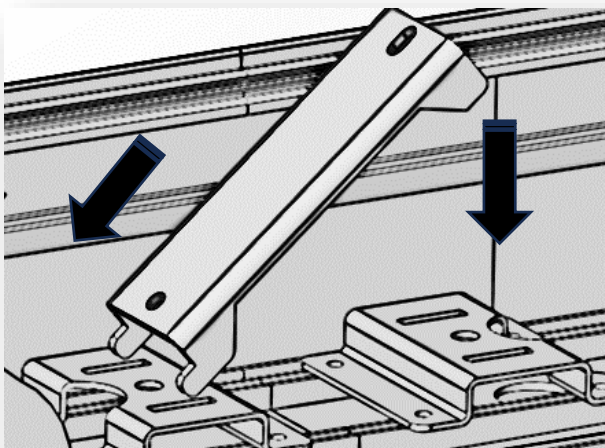

Joint housings

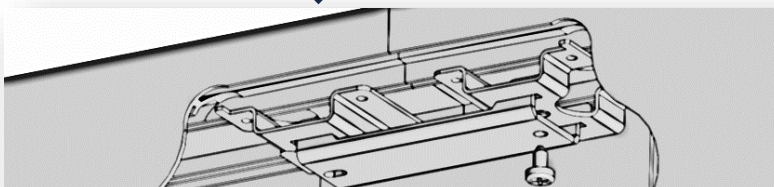

CONNECT WIRE

Included Accessories in the Package

1	2	3
		
AL linear light joint lock holder	Joint plate for ZNTH60 RECESS	Lens removal tool
1×1	1×2	1×1