

Projet:	Type:	Qté:
----------------	--------------	-------------

Highbay UFO sensor optional 240-200-150W 120-347V 5000K

The Highbay SpecLite is the ideal luminaire for powerful, efficient overhead lighting. Ready to accept motion sensor. This Highbay model is waterproof and dustproof, guaranteeing safe, durable installation in any environment. Its 90° lens projects light directly onto the floor, reducing glare to a minimum.

CARACTERISTICS

- Ready to receive a 3-pins passive infrared occupancy sensor (ZZHUPIRSS sold separately) or microwave sensor (ZZHUMSSS sold separately).
- Water and dust resistance: Certified waterproof, it ensures durable performance even in the most demanding environments.
- 90° Lens: Optimized for high-ceiling applications (over 15 feet).
- Compatible with 120 to 347 VAC voltages and selectable wattages (240W, 200W, and 150W), it offers great versatility for various applications.



NOMENCLATURE

SERIE	BEAM ANGLE	LENS	BODY COLOUR	VOLTAGE	CCT	MAX POWER	OPTIONS 1	OPTIONS 2	VER.
HU	90	C	B	F	5	240	M	D	V2
UFO highbay	90°	clear	black	120-347V	5000K	240-200-150W	motion base	dim 0-10V	V2

PHOTOMETRIC SPECIFICATIONS

LUMENS	36,579
CCT	5000K
ANGLE	80°
C.R.I.	80
DIMMABLE	0-10V DC
PHOTOCELL	N/A
SENSOR	Motion Sensor Receptacle
LUMEN MAINTENANCE L70	50,000 hrs
LED TYPE	SMD 2835
LED QTY	336
LED VOLTAGE	DC 180-260V
LED MAX CURRENT	1.2A
FLICKER	Flicker-Free

MECHANICAL SPECIFICATIONS

HOUSING MATERIAL	Die casting Aluminium
HOUSING FINISH	Black
LENS MATERIAL	Polycarbonate
LENS FINISH	Clear
WEIGHT	2.20 KG
OPERATING TEMP.	-40°C ~ 45°C

ELECTRICAL SPECIFICATIONS


REAL POWER	241.1 W
VOLTAGE	120-347V
EFFICIENCY	151.72 lm/w
POWER FACTOR	97.2 %
T.H.D	5.9 %
FREQUENCY	50/60Hz

CERTIFICATIONS

REGULATORY LISTING	cUL
EFFICIENCY LISTING	DLC Premium
DLC ID	S-GKXP58
FCC	No
BARCODE	882110007816
ENVIRONMENTAL	IP65
IK PROTECTION	IK08
SURGE PROTECTION WITH GROUNDING	6KV
SURGE PROTECTION WITHOUT GROUNDING	6KV

APPLICATION	Indoor
INSTALLATION	Suspended
CABLE LENGTH	6'



DIMENSIONS

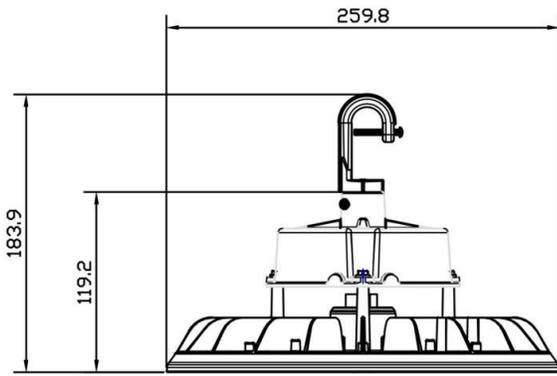

PACKAGING

DIMENSION INNER CARTON	DIMENSION OUTER CARTON	QUANTITY MASTER	MASTER WEIGHT	PALLET QUANTITY
28.90 cm X 28.90 cm X 16.20 cm	N/A	N/A	2.70 kg	72
11 3/8 " X 11 3/8 " X 6 3/8 "			5.95 lbs	

PRODUCTS IMAGES

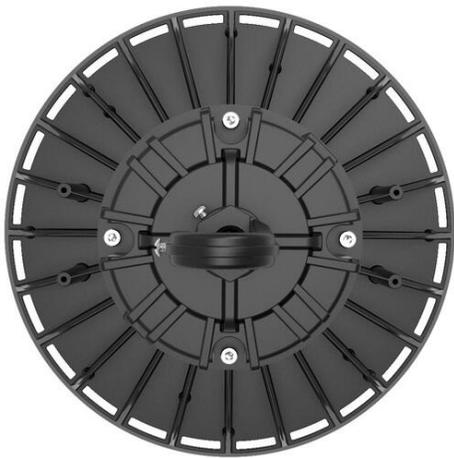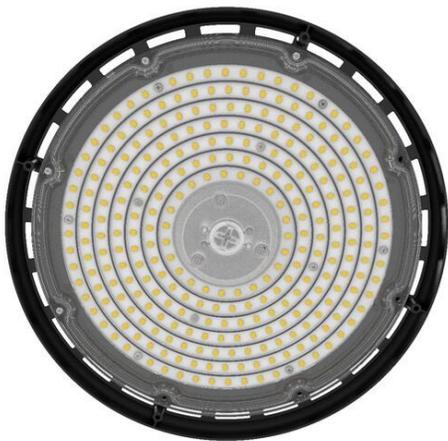

SPECLITE.CA | INFO@SPECLITE.CA | TEL: 1-855-533-8818
HEADQUARTER: 600-1111 BOUL. DR.-FREDERICK-PHILIPS MONTRÉAL, QC H4M 2X6
WAREHOUSE: 1710 AUTOROUTE TRANSCANADIENNE, DORVAL, QC, H9P 2X7